

USER ACTIVITIES:
ARMY - ME

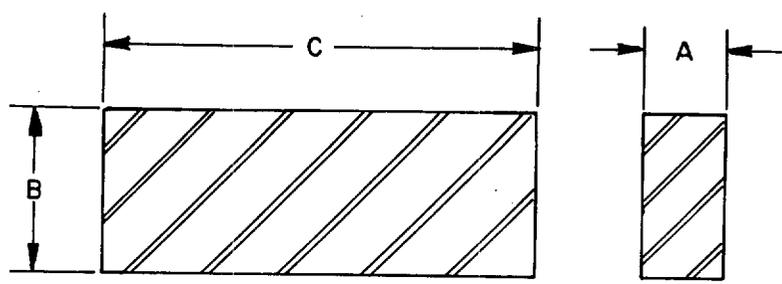


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	A NOMINAL SIZE INCHES	B NOMINAL SIZE INCHES	C NOMINAL SIZE FEET	CONDITION	ADDITIONAL REQUIREMENTS ^{1/}
-001	.018	12	4	ANNEALED	po
-003	.035	12	4	ANNEALED	po
-005	.045	12	4	ANNEALED	po
-007	.010	18	6	ANNEALED	bo
-009	.011	12	12	ANNEALED	po
-011	.016	18	6	AS FABRICATED	bo
-013	.017	12	12	ANNEALED	po
-015	.018	12	10 MIN 12 MAX	ANNEALED	ds
-017	.025	18	6	QUARTER HARD	bo
-019	.032	18	6	AS FABRICATED	bo
-021	.040	18	6	AS FABRICATED	bo
-023	.063	18	6	AS FABRICATED	bo
-025	.071	18	6	AS FABRICATED	bo
-027	.125	18	6	AS FABRICATED	bo

^{1/} SEE REQUIREMENT 3

REVIEWER ACTIVITIES:
DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P. A. NAVY- AS Other Cust ARMY- AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STRIP, METAL, CORROSION RESISTANT, TYPE 302	MILITARY STANDARD MS14511
PROCUREMENT SPECIFICATION MIL-S-5059	SUPERSEDES:		PAGE 1 OF 2

APPROVED 12 OCT 87 REVISED

REQUIREMENTS:

1. MATERIAL. STEEL, CORROSION RESISTANT, TYPE 302 (UNS S30200) AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. FORMING PROCESS. COLD ROLLED
3. ADDITIONAL REQUIREMENTS.

BRIGHT	OVERALL - CODE "bc"
PICKLED	OVERALL - CODE "pc"
DESCALED	OVERALL - CODE "ds"

4. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS14511-001

```

    |
    |----- (SEE TABLE I)
    |
    |----- BASIC MS NUMBER
    
```

5. MARKING. IRON AND STEEL PRODUCTS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-183 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

NOTES:

1. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
2. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

USER ACTIVITIES:
ARMY - ME

REVIEWER ACTIVITIES:
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

APPROVED 12 OCT 87 REVISED

P. A. NAVY- AS <i>Other Cust</i> ARMY- AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
		STRIP, METAL, CORROSION RESISTANT, TYPE 302	MS14511
PROCUREMENT SPECIFICATION MIL-S-5059	SUPERSEDES:	PAGE 2 OF 2	