


THIS STANDARD HAS BEEN FORMULATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN NINETY (90) DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

FED SUP CLASS

6240

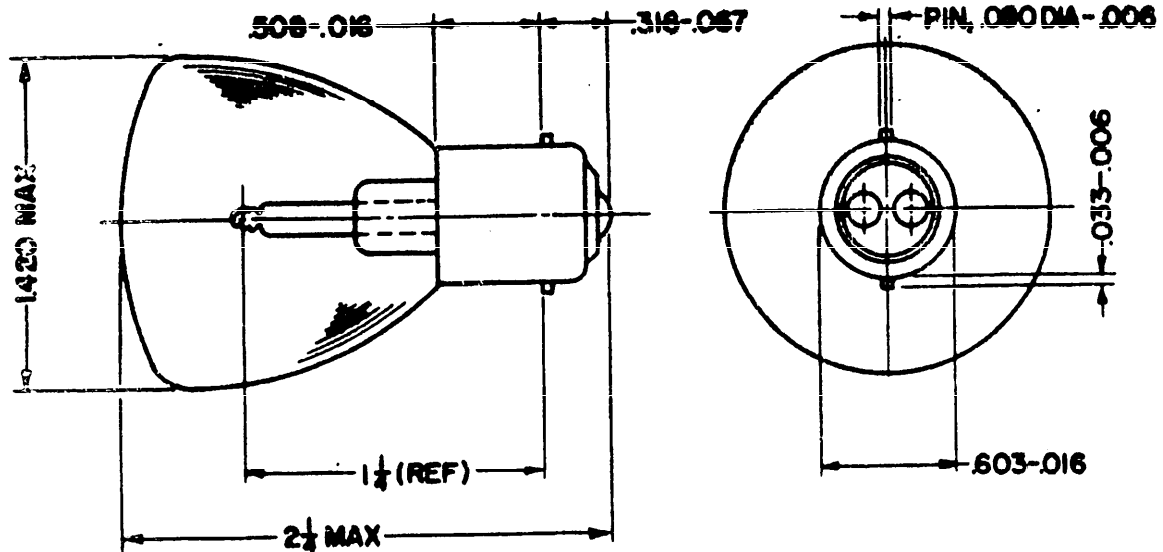

PART NUMBER	TRADE NUMBER	CANDLE POWER	DESIGN		FIL CONST	AVG LIFE (HOURS)	FIIN
			VOLTS	AMPS			
MS15564-1	1184	50 $\frac{1}{3}$	5.5	6.18 $\frac{1}{3}$	C-2V	100	155-8684
MS15564-2	1134	32 $\frac{1}{3}$	6.2	3.98 $\frac{1}{3}$	C-2R	200	155-8699
MS15564-5	1000	32 $\pm 7\%$	6.2	3.87 $\pm 4\%$	2C-2V	125/125	155-7909
MS15564-4	1144	32 $\frac{1}{3}$	12.5	1.92 $\frac{1}{3}$	C-2R	400	014-2459
MS15564-6	1196	50 $\frac{1}{3}$	12.5	3.04 $\frac{1}{3}$	C-2V	300	155-7940
MS15564-7	1124 $\frac{1}{3}$	32 $\frac{1}{3}$	12.5/12.5	1.92 $\frac{1}{3}$	2C-2R	300/300	014-2462
MS15564-3	1054	32 $\frac{1}{3}$	32.0	.74 $\frac{1}{3}$	C-2V	100	155-8685

**NOTES:** 1. DIMENSIONS IN INCHES.

- SHAPE OF BULB IS DESIGNATED BY LETTERS. SIZE IS EXPRESSED BY A NUMBER DENOTING THE APPROXIMATE DIAMETER IN EIGHTHS OF AN INCH.
- CANDLE POWER AND AMPERE RATINGS ARE IN ACCORDANCE WITH MANUFACTURER'S INFORMATION AND ARE NOT COVERED BY SPECIFICATION W-L-III.
- BURNING POSITION—BASE DOWN TO HORIZONTAL, UNLESS OTHERWISE SPECIFIED.
- ANY BURNING POSITION.
- THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
- REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

REDRAWN

OTHER INT. -SMT -AONY -USAF	<b>MILITARY STANDARD</b> <b>LAMP, INCANDESCENT</b> RP-11 BULB, DOUBLE CONTACT, BAYONET CANDELABRA BASE	<b>MS15564</b>
REVISION SPECIFICATION W-L-III	SUPERSEDED: MS15564 (SHPS)	SHEET 1 OF 1

DD FORM 672-1

APPROVED 25 JUNE 1954 REVISED (A) 17 JULY 1956