


FED SUP CLASS
5990

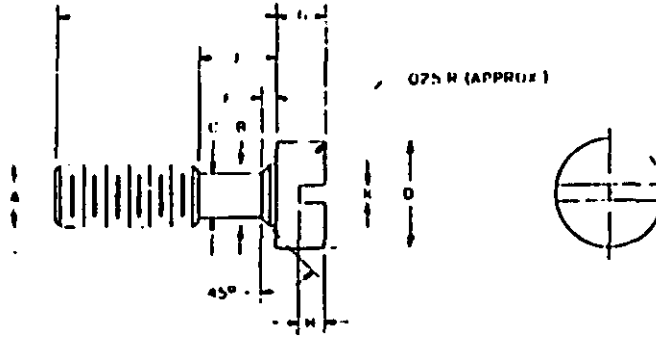

PART NUMBER	A NOMINAL SIZE	THREAD PER INCH	L LENGTH	B	C +.000 - .003	D	E	F	G	H	Z
17184-1	.112	8-32	.112	.112	.040	.175	.156	.027	.090	.060	.034
17184-2	.125	8-32	.125	.125	.101	.239	.141	.032	.113	.060	.042

MATERIAL: STEEL, Corrosion Resisting, Federal Standard 60, AISI-302 or 304, SAE-303 or 304.

PROTECTIVE TREATMENT: Corrosion Resisting Steel shall be passivated.

THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal services Handbook H-24.

DIMENSIONS: All Dimensions are in inches unless otherwise specified.

TOLERANCES: Unless otherwise specified,
Decimal ±.005
Angles ±1°

FINISH: Break edges .010-.015 Radius, Inside corners .010 Radius max.

NOTES:

- (a) This Standard takes precedence over documents referenced herein.
- (b) Referenced documents shall be of the issue in effect on date of invitations for bids.

APPROVED 20 SEPT 1960 REVISED

P.A. WEP Other Cost	TITLE SCREW, EXTERNALLY RELIEVED BODY (SYNCHRO)	MILITARY STANDARD
		MS17184(Wep)
PROCUREMENT SPECIFICATION F7-3-92	SUPERSEDES	SHEET 1 OF 1

FORM 672-1

PROVIDED ENTIRETY OF THIS FORM AND COMPLETE.

NOTICE - War Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation the United States Government thereby incurs no responsibility nor any obligation whatsoever and the fact that the Government may have furnished, in any way, any of the said drawings, specifications or other data may not be regarded as an authorization or approval or any manner bearing the title or any other person or corporation or carrying any right, or permission to manufacture, use, or sell any patented device or other article, or any other right in any other person or corporation.