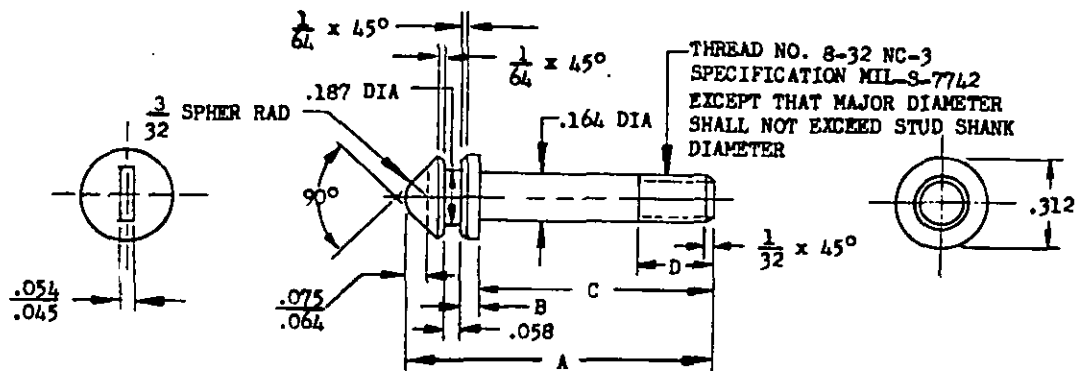


FED. SUP CLASS
5325

DASH NO.	A	B	C	D
1	41/64	.105	11/32	9/32
2		.077	3/8	5/16
3	51/64	.075	17/32	3/8
4	31/32	.091	11/16	
5	1-1/16	.055	13/16	1/2
6	1-1/8	.105	53/64	

MATERIAL: CORROSION RESISTING STEEL, SPECIFICATION QQ-S-763, CLASS 303 OR 410.

FINISH: PASSIVATE.

REMOVE BURRS AND BREAK ALL SHARP EDGES

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS $\pm 1/64$, DECIMALS $\pm .002$, ANGLES $\pm 2^\circ$.

THE MS PART NO. CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS21326-1.

(A) TO BE USED WITH MS21332

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

INTERCHANGEABILITY RELATION WITH AN3199 STUDS: MS21326 STUDS AND AN3199 STUDS OF LIKE DASH NUMBERS ARE UNIVERSALLY, FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE

P.A. MOA	TITLE	MILITARY STANDARD
Other Cust QMC WEP	STUD, STYLE IV SNAPSLIDE FASTENER	MS 21326
Procurement Specification NONE	SUPERSEDES: AN3199	SHEET 1 OF 1