



THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFICATION IN THE SOLICITATION: MIL-C-7974

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

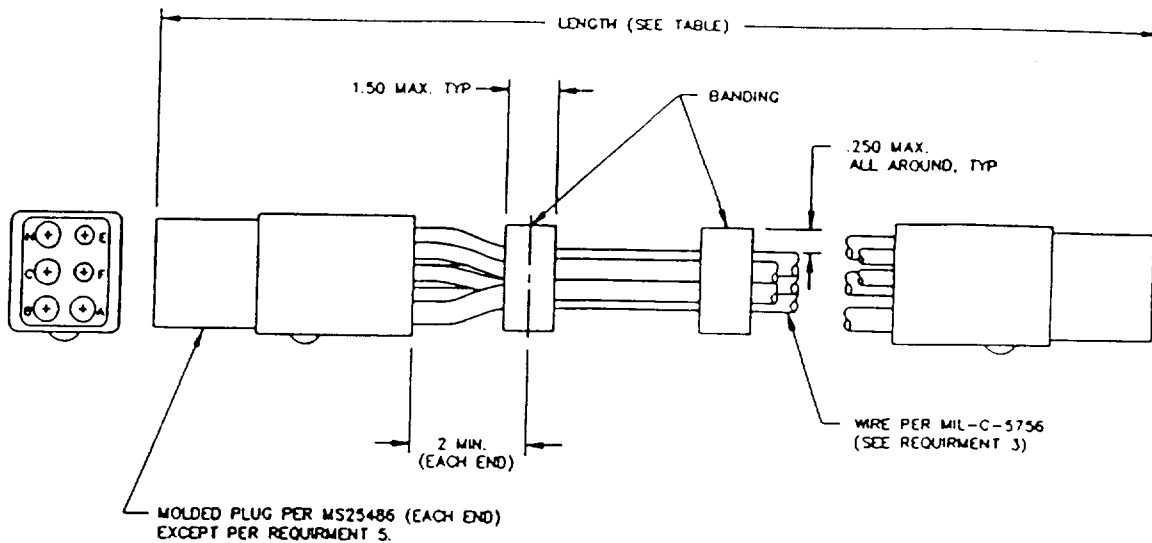

MS PART NO.	LENGTH IN FEET ±6 INCHES	A.B.N.C WIRE SIZE
MS24208-1	60	4 AWG



WIRING DIAGRAM

#### REQUIREMENTS:

1. MATERIAL: SEE PROCUREMENT SPECIFICATION
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS  $\pm 0.025$ .
3. ASSEMBLY CONSISTS OF FOUR 4 AWG SINGLE CONDUCTOR CABLES AND ONE 12 AWG TWO CONDUCTOR CABLE PER MIL-C-5756/2 AND /4 RESPECTIVELY.
4. PERMANENTLY MARKED "FOR SINGLE POINT REFUELING ONLY" BOTH SIDES ON EACH END BY STAMPED OR MOLDED LETTERS.
5. EACH PLUG SHALL HAVE A RED COLORED SURFACE OR A RED IDENTIFICATION PLUG INSERT.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

PREPARING ACTIVITY: AIR FORCE-85  
CUSTODIANS: AIR FORCE-85

REVIEW: NAVY-AS  
USER:  
PROJECT NUMBER: 6150-0237

MILITARY SPECIFICATION SHEET  
TITLE CABLE AND PLUG ASSEMBLY,  
EXTERNAL POWER 115/200 VOLTS  
3 PHASE, SINGLE POINT REFUELING

SPECIFICATION SHEET NUMBER  
MS24208 E19 AUG 1994

SUPERSEDING  
MS24208D 28 JULY 1986

AMSC- N/A FSC 6150

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Page 1 of 1