


THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODSS SPECIFIED IN THE SOLICITATION MIL-G-7703

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense

Form Approved
OMB No 0704-0188

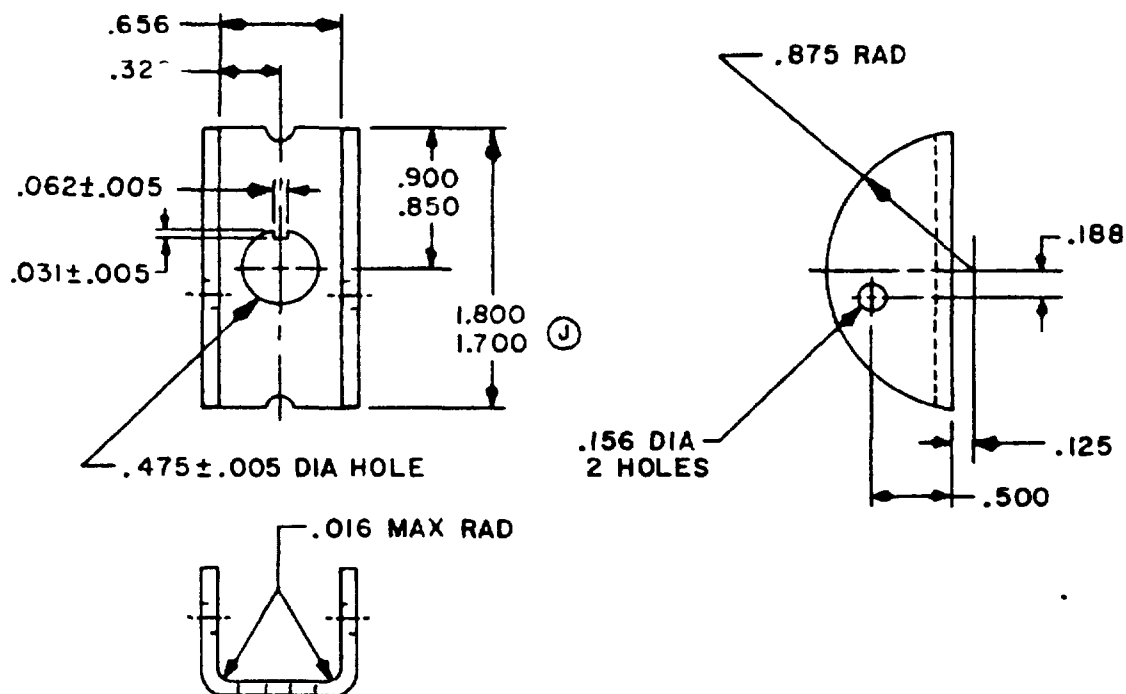

PART NO. MS24417-1

INCHES	MM	INCHES	MM
.005	0.13	.328	8.33
.008	0.20	.475	12.06
.016	0.41	.500	12.70
.031	0.49	.656	16.66
.032	0.81	.850	21.59
.062	1.57	.875	22.22
.125	3.18	.900	22.86
.156	3.96	1.700	43.18
.188	4.77	1.800	45.72

NOTES

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are $\pm .016$ on decimals.
4. Material Steel, commercial, .032 $\pm .008$, shall be smooth and free from burrs.
5. Finish Zinc plate, QQ-Z-325, type III, or cadmium plate, QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or DOD-P-15328, black enamel, lusterless, color number 37038 or semigloss, color number 27038, Federal Standard 595 or equivalent.
6. This standard takes precedence over documents referenced herein.
7. Referenced documents shall be of the issue in effect on date of invitations for bid.

① denotes changes

PREPARING ACTIVITY Air Force-85 CUSTODIANS ARMY ER NAVY AS AIR FORCE 85 DLA	MILITARY SPECIFICATION SHEET TITLE GUARD, SWITCH, 2 OR 3 POSITION	SPECIFICATION SHEET NUMBER MS24417 J 5 Sept 1989
REVIEW Air Force-99 USER PROJECT NUMBER 5930-1421		SUPERSADING MS24417H 16 Sept 1985 AMSC N/A FSC 5930
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited		Page 1 of 1