


USER SYMBOLS:
NAVY - SH

REVIEWER SYMBOLS:
ARMY - ME
NAVY - AS
USAF - 11

"Revised/see. Information is current as of the date of this document. For future consideration of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments, Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

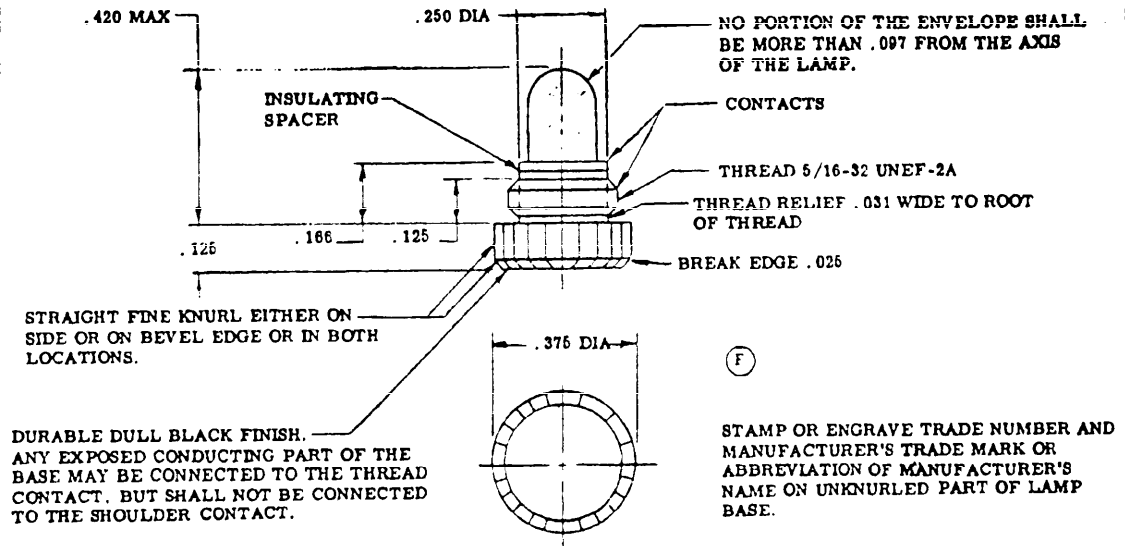

DASH NO.	FORMER DASH NO.	RATED OPERATING POTENTIAL, VOLTS	DESIGN CURRENT AMPERES	COLOR OF ENVELOPE	SPHERICAL CANDLE POWER	AVERAGE LIFE HOURS
323	--	3	.19	CLEAR	.25±25%	350
323R	R323	3	.19	RED	.04±25%	350
8023	623	28	.04	CLEAR	.25±25%	1000
8023R	R623	28	.04	RED	.04±25%	1000
8636	639	6	.22	CLEAR	.25±25%	500
8639R	R639	6	.22	RED	.04±25%	500

NOTES:

1. THREADS SHALL BE IN ACCORDANCE WITH FEDERAL HANDBOOK H-26.
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED. TOLERANCES: DECIMALS ± .015.
3. LIGHT EMITTED BY RED LAMPS SHALL CONFORM TO MIL-C-25050 FOR INSTRUMENT PANEL AND LIGHTING RED.
4. ALL CURRENT DASH NUMBERS ARE PROPERLY ASSIGNED A. S. A. NUMBERS

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(F) REVISED

P.A. NAVY - AS Other Cust	TITLE	MILITARY STANDARD
ARMY - ME USAF - 11	LAMPS, INCANDESCENT-T-1-1/4, KNURLED SCREW BASE	MS25236
PROCUREMENT SPECIFICATION MIL-I-6363	SUPERSEDES:	SHEET 1 OF 1
	AN3136; MS15630 (SHIPS)	

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. W-0104

PLATE NO. 16320

APPROVED 27 MAR 57 REVISED (D) 16 APRIL 1965 (E) 21 SEP 66 (G) 12 January 1967