


NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government hereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have furnished, furnished, or in any way supplied this said drawings, specifications, or other data, it is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any right or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

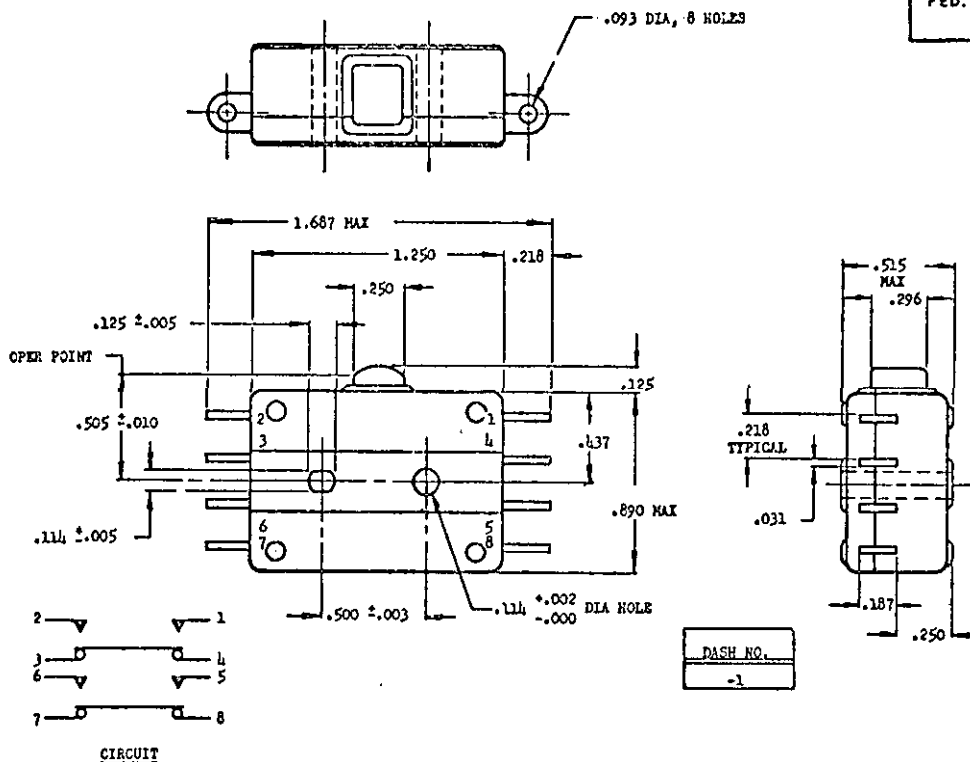

(B)	ACTUATING FORCE	2.18 LBS MAX
(E)	PRETRAVEL	.060 MAX
(F)	MOVEMENT DIFFERENTIAL	.035 MAX
(G)	OVERTRAVEL	.015 MIN
(I)	MINIMUM OPERATING CYCLES	100,000
(J)	WEIGHT	.04 LBS MAX
(K)	STRENGTH OF PUSH BUTTON AND PUSH BUTTON STOP	25 LBS
(L)	STRENGTH OF TERMINALS	5 LBS
(N)	CONTACT GAP	DOUBLE .020
(P)	AMBIENT TEMPERATURE RANGE	-70° to +150°C

CURRENT CAPACITY 28 VOLTS DC			CURRENT CAPACITY 115 VOLTS, 400 CYCLES AC		
RESISTIVE	INDUCTIVE	MOTOR	RESISTIVE	INDUCTIVE	MOTOR
15	10	10	15	15	6

MATERIAL: CASE, COVER AND PUSH BUTTON: DIALYL PHTHALATE.

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015.

EXACT SHAPE OF SWITCH OPTIONAL, PROVIDED DIMENSIONS SPECIFIED ARE NOT EXCEEDED.

TEST REQUIREMENT: FOR SHORT CIRCUIT TEST, USE AN-16 CABLE AND CIRCUIT BREAKER MS25017-15.

ⓑ CANCELLED - For procurement use MIL-S-8805/15

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF 85 Other Cust USAF 85	TITLE SWITCH, SENSITIVE - MOMENTARY 15 AMP, 4 CIRCUIT, END SOLDER TERMINAL	MILITARY STANDARD MS25348(ASG)
PROCUREMENT SPECIFICATION MIL-S-5713	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5930-F230-9

☆ U. S. GOVERNMENT PRINTING OFFICE: 1968-341-513/A-2405

This standard has been approved by the BuRep. (Department of the Navy) and the Dept. of the USAF, and is mandatory for use by their activity. All other military activities are required to employ this standard where suitable.

APPROVED 13 Oct 58
REVISED A 25 May 60
B 11 OCT 68