


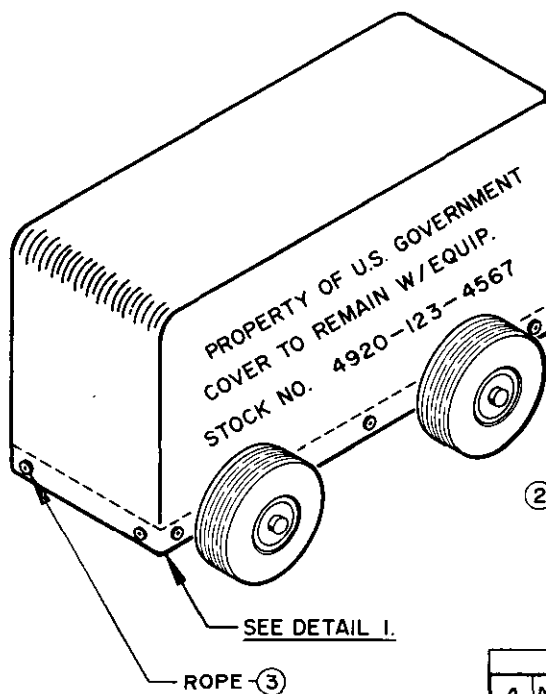
FED. SUP CLASS  
PACK

FIGURE 1.

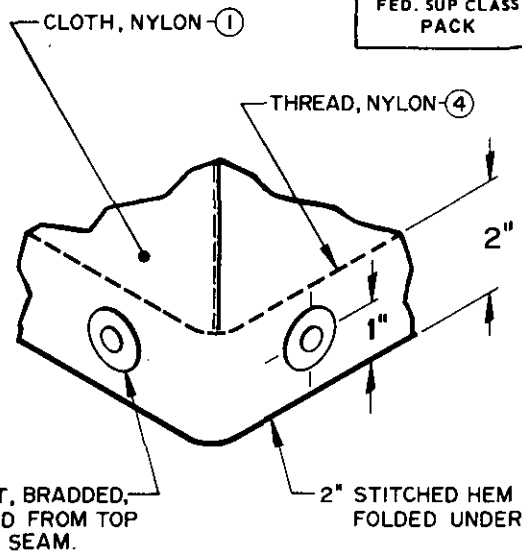

DETAIL 1.

## BILL OF MATERIAL

4	A/R	THREAD, NYLON	V-T-295
3	3	ROPE, TENT-LAY	MIL-R-1670
2	2	GROMMET, METALIC, TYPE III, SIZE 3	MIL-G-16491
1	1	CLOTH, COATED NYLON, WATERPROOF	MIL-C-20696

## NOTES

SHROUDS SHALL BE FABRICATED TO FORM A WATERPROOF COVER TO THE PHYSICAL AND DIMENSIONAL CHARACTERISTICS OF THE EQUIPMENT. THE SIZE OF THE SHROUDS SHALL BE THE MINIMUM CONSISTENT WITH THE SIZE OF THE EQUIPMENT.

- 1 THE QUANTITY OF CLOTH MATERIAL REQUIRED IS TO BE DETERMINED BY THE VOLUME OF AREA TO BE COVERED BY THE SHROUD. SEAMS SHALL BE ONE ROW, STITCHED WITH A SEWING MACHINE AND SPACED A MINIMUM OF 3/4 INCH FROM THE EDGE OF THE MATERIAL. THE HEM SHALL BE ONE ROW STITCHED WITH A SEWING MACHINE WITH THE FOLD A MINIMUM OF 2 INCHES FOR INSTALLING GROMMETS. THE HEM SHALL BE FOLDED TO THE INSIDE OF THE SHROUD.
- 2 GROMMETS SHALL BE INSTALLED CLOSE TO EACH CORNER OF EACH END AND SIDE OF THE SHROUD (SEE DETAIL 1, FIGURE 1). AN ADDITIONAL GROMMET SHALL BE INSTALLED ON EACH SIDE, SPACED EQUIDISTANT FROM EACH CORNER GROMMET. THE GROMMETS POSITIONED AS SPECIFIED ABOVE SHALL BE INSTALLED IN THE HEM SPACED ONE INCH FROM THE TOP EDGE OF THE SEAM TO THE CENTER OF THE GROMMET HOLE (SEE DETAIL 1, FIGURE 1).
- 3 ROPE SHALL BE 1/4, 5/16 OR 3/8 INCH NORMAL DIAMETER. ADEQUATE TIE-DOWN CAPABILITY SHALL DETERMINE THE LENGTH OF ROPE REQUIRED. ONE ROPE SHALL BE PROVIDED FOR EA. INSTALLED GROMMET. ONE END OF THE ROPE SHALL BE SPLICED THROUGH EACH GROMMET.

SPECIAL MARKING — THE COVER SHALL BE STENCILED WITH THE FEDERAL STOCK NUMBER OF THE EQUIPMENT FOR WHICH IT WAS DESIGNED (SEE FIGURE 1). LETTERING SHALL NOT BE LESS THAN ONE INCH IN HEIGHT.

THIS IS A DESIGN STANDARD — NOT TO BE USED AS A PART NUMBER.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

## REINSTATED - TO SUPPORT AIR FORCE PROCUREMENT

(C) CANCELLED 11 Nov 85 — NO SUPERSEDING DOCUMENT.

P.A. AIR FORCE - 99	TITLE	MILITARY STANDARD
Other Cost	SHROUD FOR AEROSPACE GROUND EQUIPMENT	MS 27766(USAF)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: 68SAC12031	SHEET   OF