

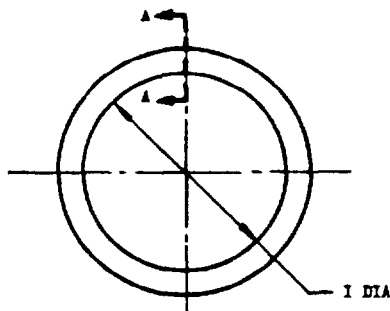


ALL DIAMETERS OF CROSS SECTION SHALL EQUAL W

FED SUP CLAM  
5330

ENLARGED VIEW - SECTION A-A

DASH NO.	ACTUAL SIZE			
	W	DIA	I	DIA
004	.070		.070	
005	.070		.101	
006	.070		.114	
007	.070		.145	
008	.070		.176	
009	.070		.208	
010	.070		.239	
011	.070		.301	
012	.070		.364	
013	.070		.426	
014	.070		.489	
015	.070		.551	
016	.070		.614	
017	.070		.676	
018	.070		.739	
019	.070		.801	
020	.070		.864	
021	.070		.926	
022	.070		.989	
023	.070		1.051	
024	.070		1.114	
025	.070		1.176	
026	.070		1.239	
027	.070		1.301	
028	.070		1.364	
110	.103		.362	
111	.103		.424	
112	.103		.487	
113	.103		.549	
114	.103		.612	
115	.103		.674	
116	.103		.737	
117	.103		.799	
118	.103		.862	
119	.103		.924	
120	.103		.987	
121	.103		1.049	
122	.103		1.112	
123	.103		1.174	
124	.103		1.237	
125	.103		1.299	
126	.103		1.362	
127	.103		1.424	
128	.103		1.487	
129	.103		1.549	
130	.103		1.612	
131	.103		1.674	
132	.103		1.737	
133	.103		1.799	
134	.103		1.862	
135	.103		1.925	
136	.103		1.987	
137	.103		2.050	
138	.103		2.112	
139	.103		2.175	
140	.103		2.237	
141	.103		2.300	
142	.103		2.362	

DASH NO.	ACTUAL SIZE			
	W	DIA	I	DIA
143	.103		2.425	
144	.103		2.487	
145	.103		2.550	
146	.103		2.612	
147	.103		2.675	
148	.103		2.737	
149	.103		2.800	
210	.139		.734	
211	.139		.796	
212	.139		.859	
213	.139		.921	
214	.139		.984	
215	.139		1.046	
216	.139		1.109	
217	.139		1.171	
218	.139		1.234	
219	.139		1.296	
220	.139		1.359	
221	.139		1.421	
222	.139		1.484	
223	.139		1.546	
224	.139		1.609	
225	.139		1.671	
226	.139		1.734	
227	.139		1.796	
228	.139		1.859	
229	.139		1.921	
230	.139		1.984	
231	.139		2.046	
232	.139		2.109	
233	.139		2.171	
234	.139		2.234	
235	.139		2.296	
236	.139		2.359	
237	.139		2.421	
238	.139		2.484	
239	.139		2.546	
240	.139		2.609	
241	.139		2.671	
242	.139		2.734	
243	.139		2.796	
244	.139		2.859	
245	.139		2.921	
246	.139		2.984	
247	.139		3.046	
248	.139		3.109	
249	.139		3.171	
250	.139		3.234	
251	.139		3.296	
252	.139		3.359	
253	.139		3.421	
254	.139		3.484	
255	.139		3.546	
256	.139		3.609	
257	.139		3.671	
258	.139		3.734	
259	.139		3.796	
260	.139		3.859	
261	.139		3.921	
262	.139		3.984	

DASH NO.	ACTUAL SIZE			
	W	DIA	I	DIA
263	.139		7.234	
264	.139		7.296	
265	.139		7.359	
266	.139		7.421	
267	.139		7.484	
268	.139		7.546	
269	.139		7.609	
270	.139		7.671	
271	.139		7.734	
272	.139		7.796	
273	.139		7.859	
274	.139		7.921	
325	.210		1.475	
326	.210		1.537	
327	.210		1.599	
328	.210		1.662	
329	.210		1.724	
330	.210		1.787	
331	.210		1.849	
332	.210		1.912	
333	.210		1.975	
334	.210		2.037	
335	.210		2.100	
336	.210		2.162	
337	.210		2.225	
338	.210		2.287	
339	.210		2.350	
340	.210		2.412	
341	.210		2.475	
342	.210		2.537	
343	.210		2.600	
344	.210		2.662	
345	.210		2.725	
346	.210		2.787	
347	.210		2.850	
348	.210		2.912	
349	.210		2.975	
425	.275		4.475	
426	.275		4.537	
427	.275		4.599	
428	.275		4.662	
429	.275		4.724	
430	.275		4.787	
431	.275		4.849	
432	.275		4.912	
433	.275		4.975	
434	.275		5.037	
435	.275		5.100	
436	.275		5.162	
437	.275		5.225	
438	.275		5.287	
439	.275		5.350	
440	.275		5.412	
441	.275		5.475	
442	.275		5.537	
443	.275		5.600	

(A) FOR CHANGES SEE SHEETS 1 AND 2.

P.A. USAF - 11 OTHER CUST. Navy - WP Army - MR A		INTERNATIONAL INTEREST  (A)	MILITARY STANDARD  PACKING, PREFORMED, "O" RING, SYNTHETIC LUBRICANT RESISTANT	MS29561
PROCUREMENT SPECIFICATION P.L.-A-7562 TYPE1		SUPERSEDES		SHEET 1 OF 2

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

User activities: USAF - 11, 69, 85  
Navy - WP  
Army - MR, MG, MC, WC

Review activities: USAF - 11, 69, 85  
Navy - WP  
Army - MR, MG, MC, WC

FED SUP CLASS  
5330

DASH NO.	ACTUAL SIZE			
	W	DIA	I	DIA
444	.275		7.725	
445	.275		7.975	
446	.275		8.475	
447	.275		8.975	
448	.275		9.475	
449	.275		9.975	
450	.275		10.475	
451	.275		10.975	
452	.275		11.475	
453	.275	±.006	11.975	±.030
454	.275		12.475	
455	.275		12.975	
456	.275		13.475	
457	.275		13.975	
458	.275		14.475	
459	.275		14.975	
460	.275		15.475	

DIMENSIONS IN INCHES.

RINGS SHALL BE PACKAGED IN ACCORDANCE WITH MIL-P-1861.

A CERTAIN PROVISIONS (DASH NUMBER, SIZE, AND TOLERANCES) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABC AIR STD 17/27 AND STANAG NO. 3444. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIAN WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENT CONCERNED.

A FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.  
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. USAF - 11 OTHER CUST. Navy - WP Army - MR	INTERNATIONAL INTEREST <input type="checkbox"/>	<b>MILITARY STANDARD</b>	<b>MS29561</b>
		PACKING, PREFORMED, "O" RING, SYNTHETIC LUBRICANT RESISTANT	
PROCUREMENT SPECIFICATION MIL-R-7362 TYPE I		SUPERSEDES	SHEET 2 OF

 DD FORM 672-1 (Coordinated)  
 1 OCT 52

APPROVED 1 APR 50 REVISED 6 FOR CHANGES SEE SHEETS 1 AND 2.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

 Review activities: USAF - 11, 69, 85  
 Navy - WP  
 Army - MR, MI, MO, MC

 User activities: USAF -  
 Navy - SH, MC  
 Army - OL