

INCH-POUND

MS3124G
 31 October 2011
 SUPERSEDING
 MS3124F
 07 November 2007


DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRIC, CRIMP TYPE,
 REAR MOUNTING, JAM NUT, BAYONET COUPLING, SERIES 1, CLASSES E, F AND P

Inactive for new design after 5 September 1975.

This specification is approved for use by all Departments
 and Agencies of the Department of Defense.


The requirements for acquiring the product described herein
 shall consist of this specification sheet and MIL-DTL-26482.

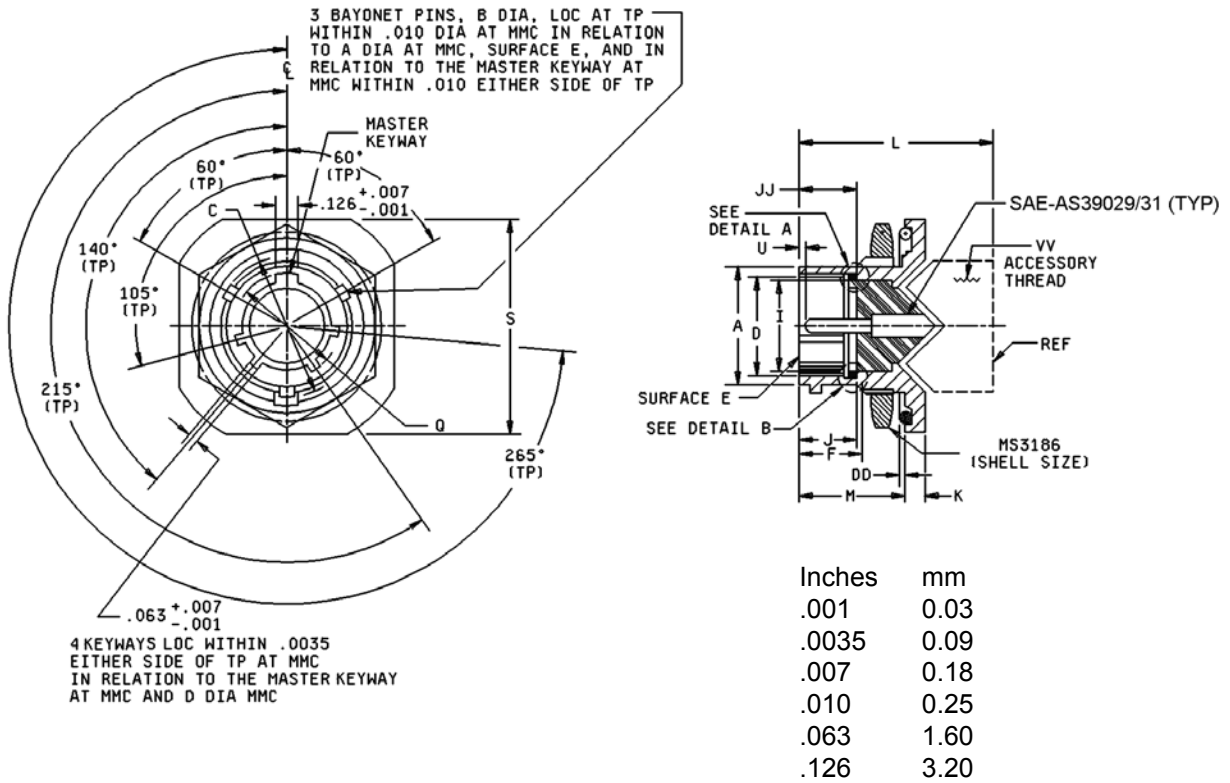

STYLE P (PIN INSERT)

FIGURE 1. Receptacle, dimensions, classes E, F and P.


MS3124G

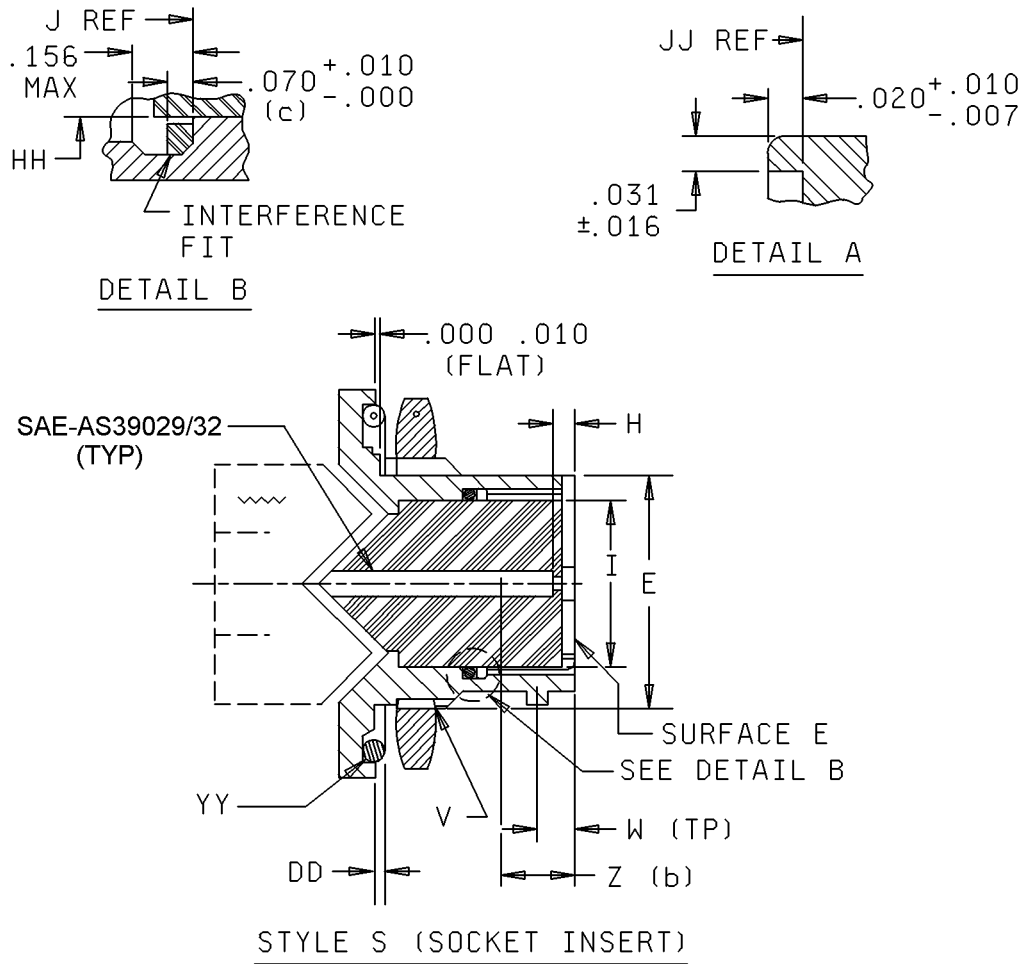

Inches	mm
.007	0.18
.010	0.25
.020	0.51
.031	0.79
.070	1.78
.156	3.96

FIGURE 1. Receptacle, dimensions, classes E, F, and P - Continued.

MS3124G



PANEL MTG
DIMS REF

Shell size	DD +.011 O-ring protection	HH max ID gasket	FF +.010 -.005 panel mounting hole	GG +.010 -.005 panel flat location
8	.023 (0.58)	.329 (8.36)	.572 (14.53)	.540 (13.72)
10		.457 (11.61)	.697 (17.70)	.665 (16.89)
12		.564 (14.33)	.885 (22.48)	.828 (21.03)
14		.689 (17.50)	1.010 (25.65)	.952 (24.18)
16		.814 (20.68)	1.135 (28.83)	1.076 (27.33)
18		.907 (23.04)	1.260 (32.00)	1.201 (30.51)
20	.028 (0.71)	1.032 (26.21)	1.385 (35.18)	1.326 (33.68)
22		1.164 (29.57)	1.510 (38.35)	1.451 (36.86)
24		1.259 (31.98)	1.635 (41.53)	1.576 (40.03)

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

MS3124G

Shell size	A dia +.001 -.005 OD	B dia +.006 -.002 bay pin	C dia +.000 -.016 over bay pins	D dia +.005 -.001 ID	E +.000 -.010 mounting flat	F min mounting thread location	G +.000 -.032 across flange corner
8	.473 (12.01)	.078 (1.98)	.563 (14.30)	.362 (9.19)	.530 (13.46)	.384 (9.75)	1.078 (27.38)
10	.590 (14.99)		.680 (17.27)	.490 (12.45)	.655 (16.64)		1.203 (30.56)
12	.750 (19.05)		.859 (21.82)	.607 (15.42)	.818 (20.78)		1.391 (35.33)
14	.875 (22.23)		.984 (24.99)	.732 (18.59)	.942 (23.93)		1.516 (38.51)
16	1.000 (25.40)		1.108 (28.14)	.857 (21.77)	1.066 (27.08)		1.641 (41.68)
18	1.125 (28.58)		1.233 (31.32)	.962 (24.43)	1.191 (30.25)		1.766 (44.86)
20	1.250 (31.75)		1.358 (34.49)	1.087 (27.61)	1.316 (33.43)		.446 (11.33)
22	1.375 (34.93)	1.483 (37.67)	1.212 (30.78)	1.441 (36.60)		2.078 (52.78)	
24	1.500 (38.10)	.125 (3.18)	1.610 (40.89)	1.337 (33.96)	1.566 (39.78)	.479 (12.17)	2.203 (55.96)

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

MS3124G

Shell size	H + .000 - .020 socket insert location	I dia max insert	J + .010 packing location	JJ + .000 - .020 pin insert location	K \pm .016 thick mounting flange	M + .031 - .000 mounting flange location
8	.025 (0.64)	.285 (7.24)	.382 (9.70)	.332 (8.43)	.117 (2.97)	.691 (17.55)
10		.402 (10.21)				
12		.516 (13.11)				
14		.641 (16.28)				
16		.766 (19.46)				
18		.855 (21.72)				
20	.087 (2.21)	.980 (24.89)	.444 (11.28)	.394 (10.01)	.148 (3.76)	.879 (22.33)
22		1.105 (28.07)				
24		1.229 (31.22)				.912 (23.16)

FIGURE 1. Receptacle dimensions, classes E, F and P – Continued.


MS3124G

Shell size	P panel thickness (ref)		Q dia +.005 -.006 over keyways	S max length side	U +.010 -.020 pin contact location	V class 2A mounting thread
	min	max				
8	.062 (1.57)	.125 (3.18)	.412 (10.46)	.954 (24.23)	.085 (2.16)	9/16-24
10			.540 (13.72)	1.078 (27.38)		11/16-24
12			.689 (17.50)	1.266 (32.16)		7/8-20
14			.814 (20.68)	1.391 (35.33)		1-20
16			.939 (23.85)	1.516 (38.51)		1-1/8-18
18			1.039 (26.39)	1.641 (41.68)		1-1/4-18
20	.250 (6.35)		1.164 (29.57)	1.828 (46.63)	.147 (3.73)	1-3/8-18
22			1.289 (32.74)	1.954 (49.63)		1-1/2-18
24			1.414 (35.92)	2.078 (52.78)		1-5/8-18

Shell size	W (TP) bay pin location	Z (b) +.000 -.078 socket contact spring location	YY O-ring seal MS29513- (per SAE-AS29513)	V V class 2B accessory thread	
8	.100 (2.54)		017	5/8-24	
10			019	3/4-20	
12			.153 (3.89)	022	7/8-20
14			024	1-20	
16			026	1-1/8-18	
18			028	1-1/4-18	
20	.215 (5.46)		128	1-3/8-18	
22			130	1-1/2-18	
24			.109 (2.77)	132	1-5/8-18

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.


MS3124G

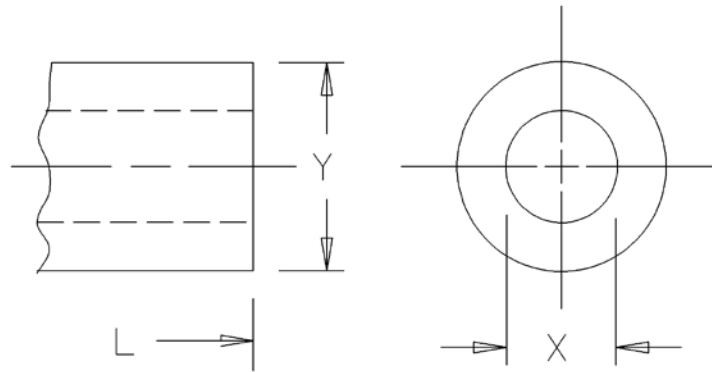Class E


Dimensions – class E only			
Shell size	L max over-all length	X dia min ID	Y dia max OD
8	1.552 (39.42)	.259 (6.58)	.750 (19.05)
10		.359 (9.12)	.875 (22.23)
12		.469 (11.91)	1.000 (25.40)
14		.589 (14.96)	1.125 (28.58)
16		.717 (18.21)	1.250 (31.75)
18		.779 (19.79)	1.375 (34.93)
20	1.709 (43.41)	.901 (22.89)	1.531 (38.89)
22		1.009 (25.63)	1.656 (42.06)
24		1.123 (28.52)	1.781 (45.24)

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

MS3124G

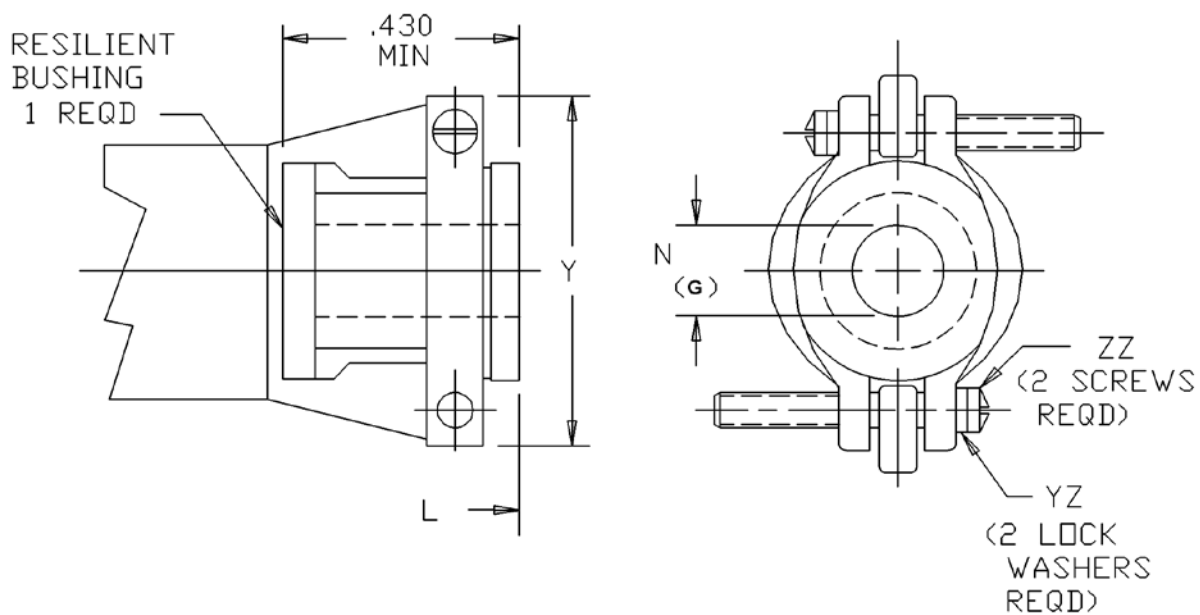

Class F

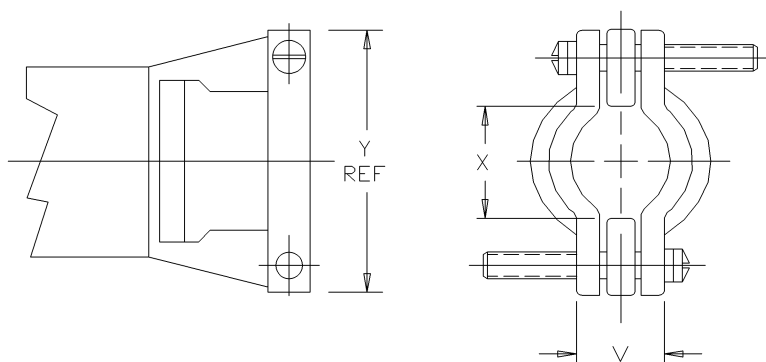

Inch mm
.430 10.92

Class F, bushing removed

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.


MS3124G

Dimensions, class F only				
Shell size	L max over-all length	X dla min open	Y max	V max closed
8	2.422 (61.52)	.234 (5.94)	.828 (21.03)	.187 (4.75)
10		.297 (7.54)	.891 (22.63)	.187 (4.75)
12		.422 (10.72)	1.016 (25.81)	.281 (7.14)
14		.547 (13.89)	1.141 (28.98)	.325 (8.26)
16	2.537 (64.44)	.609 (15.47)	1.203 (30.56)	.356 (9.04)
18		.734 (18.64)	1.469 (37.31)	.456 (11.58)
20	2.824 (71.73)	.922 (23.42)	1.656 (42.06)	.519 (13.18)
22				
24	2.900 (73.66)	.984 (24.99)	1.750 (44.45)	.657 (16.69)

Dimensions, class F only			
Shell size	N free dia $\pm .010$	ZZ screw threads	YZ lockwashers NASM35338 NASM35333
8	.110 (2.79)	6-32 UNC	NASM35338 -98 or -41 NASM35333 -105 or -37
10	.173 (4.39)		
12	.297 (7.54)		
14	.360 (9.14)		
16	.485 (12.32)		
18	.610 (15.49)	8-32 UNC	NASM35338 -99 or -42 NASM35333 -106 or -38
20	.610 (15.49)		
22	.735 (18.67)		
24	.785 (19.94)		

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

MS3124G

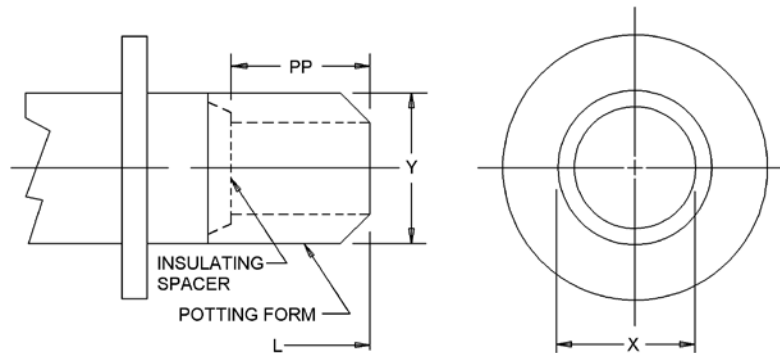

Class P

Dimensions – class P only				
Shell size	L max over-all length	X dia min	Y dia max	PP min
8	1.675 (42.55)	.317 (8.05)	.608 (15.44)	.250 (6.35)
10		.434 (11.02)	.734 (18.64)	
12		.548 (13.92)	.858 (21.79)	
14		.673 (17.09)	.984 (24.99)	
16		.798 (20.27)	1.110 (28.19)	
18		.899 (22.83)	1.234 (31.34)	
20	1.963 (49.86)	1.024 (26.01)	1.360 (34.54)	
22	1.963 (49.86)	1.149 (29.18)	1.484 (37.69)	
24	2.025 (51.44)	1.274 (32.36)	1.610 (40.89)	

NOTES:

1. Dimensions are in inches. Metric equivalents are given for information only.
2. Distance between end of shell and the point at which a gage pin having the same basic diameter as the mating contact and a square face first engages socket contact spring.
3. Packing material shall meet the requirements of ASTM-D2000.
4. True position (TP) tolerances specified are in accordance with ASME Y14.5M.
5. For class F: Use SAE-AS85049/139 bushing if reduced opening is required. Lockwashers may be captivated.

FIGURE 1. Receptacle, dimensions, classes E, F and P – Continued.

MS3124G

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Connector mating: This connector mates with MS3121 and MS3126.

Insert arrangement shall be in accordance with MIL-STD-1669.

Sealing member: Bonded to vitreous insert.


Packing material shall meet the requirements of ASTM-D2000.

Finishes: A finish designator shall not be included in the PIN when finish W is required. See MIL-DTL-26482 for alternative finishes D, T and Z for classes E, F and P.

Material:

- a. Shell - aluminum alloy.
- b. Bayonet pins (B dia) - stainless steel, passivated.

Part or Identifying Number (PIN) example:

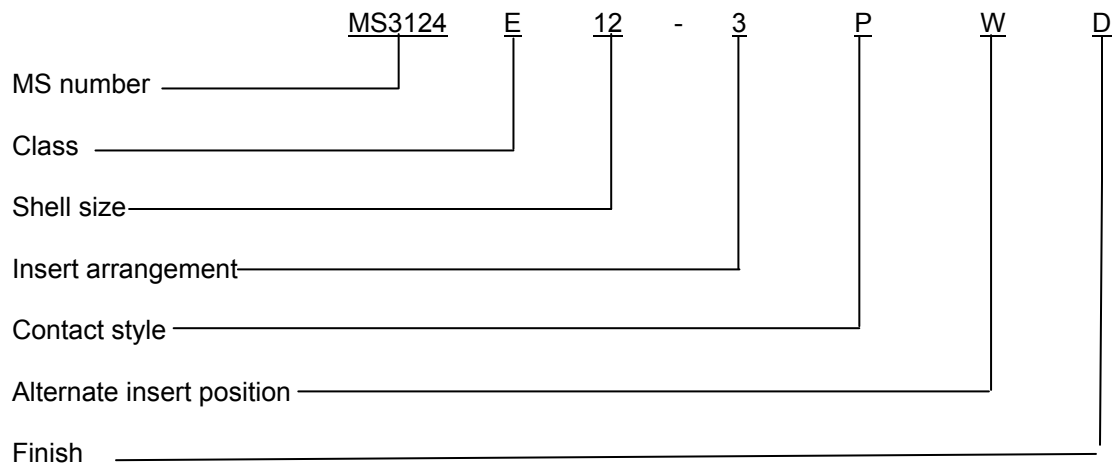

Note: When finish W is required, no finish designator is used (class W is the default finish).

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-26482, this document references the following:

MS3121
 MS3126
 MS3186
 MIL-STD-1669
 ASME Y14.5M
 ASTM-D2000
 SAE-AS29513
 SAE-AS39029/31
 SAE-AS39029/32
 SAE-AS85049/139
 NASM35333
 NASM35338

MS3124G

CONCLUDING MATERIAL

Custodians:

Army - CR
Air Force - 85
DLA - CC

Preparing activity:

DLA - CC

(Project 5935-2011-111)

Review activities:

Army - AR, MI

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.daps.dla.mil>.