


USER ACTIVITIES: ARMY-HE  
NAVY-HE

REVIEWER ACTIVITIES: DLA-CS

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. ANSC R/A

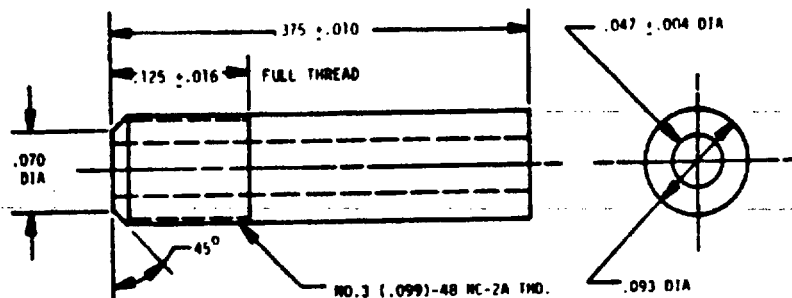

#### REQUIREMENTS:

- (A) 1. MATERIAL: BRASS CONFORMING TO COMPOSITION 11 OR COPPER ALLOY NO. 360, TEMPER HALF-HARD MINIMUM OF QQ-B-626.
2. FINISH: SILVER PLATE CONFORMING TO TYPE II, .0005 MINIMUM THICKNESS, OF QQ-S-365.

#### NOTES:

1. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE:  $\pm .005$  FOR DECIMALS,  $\pm 1/64$  FOR FRACTIONS, AND  $\pm 2^\circ$  FOR ANGLES.
  - (A) 2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
  - (A) 3. REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
- \*\* THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

(A) DENOTES CHANGE

P. A. ARMY-AT Other Cost AF-99	INTERNATIONAL INTEREST	TITLE ADAPTER LEAD, TO TERMINAL: SPARK PLUG CABLE (OTHER THAN AIRCRAFT)	MILITARY STANDARD MS51016
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1	