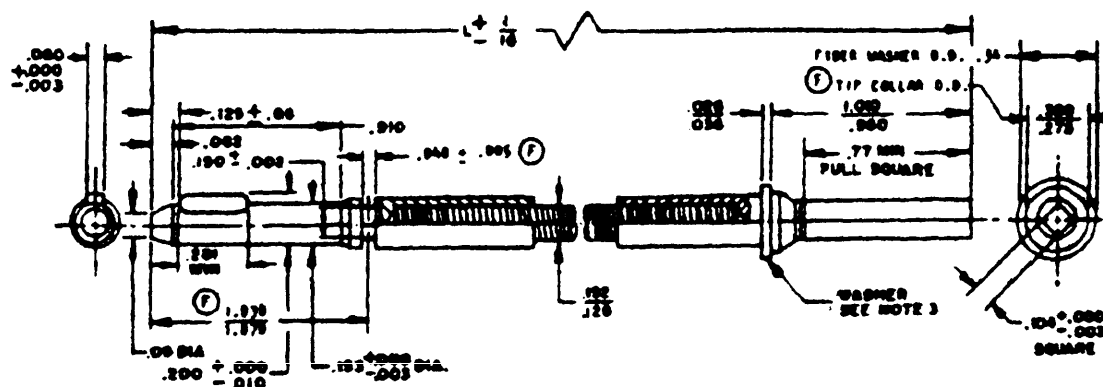


FED. SUP. CLASS
6880

MS PART NO.	FORMER ARMY PART NO.	CORE LENGTH (L)
MS 51072-1	8749985	18-21/32
MS 51072-2	7576737	23-21/32
MS 51072-3	7418487	41-5/32
MS 51072-4	7527483	54-5/32
MS 51072-5	7064607	63-21/32
MS 51072-7	7064520	68-21/32
MS 51072-8	7418498	73-21/32
MS 51072-9	7418491	78-21/32
MS 51072-10	7527481	86-5/32
MS 51072-11	7418830	91-5/32
MS 51072-12	7418490	96-5/32
MS 51072-13	7527482	101-5/32
MS 51072-14	7984852	108-21/32
MS 51072-15	7984853	145-5/32
MS 51072-16	7064524	157-5/32
MS 51072-17	8366051	169-5/32
MS 51072-18	8741685	217-5/32
MS 51072-19	7355827	121-5/32
MS 51072-20	8345796	139-5/32
MS 51072-21		14-5/32

NOTES

- TYPE 1, GROUPS A AND B, CLASS 4 (CORE, FLEXIBLE SHAFT ASSEMBLY) OF PROCUREMENT SPECIFICATION
- FOR ASSOCIATED SHAFT ASSEMBLIES, FLEXIBLE, SEE MS51071.
- MATERIAL WASHER, FIBER, VULCANIZED, ELECTRICAL AND MECHANICAL GRADES, GRADE-CM, FORM-S, MIL-F-114B.
- METHOD OF SECURING CORE TIPS TO CORE TO BE AT MANUFACTURER'S OPTION, AND SHALL WITHSTAND A MINIMUM PULL OF 50 POUNDS BEFORE FAILURE.
- OUTER LAYER OF CORE WIRES SHALL BE WOUND IN THE DIRECTION OF RIGHT HAND LAY.
- DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE : .010 ON DECIMALS.
- IN THE EVENT OF CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
- THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
- REFERENCED GOVERNMENT DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DOJISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

(F) DENOTES CHANGE

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Solicitation for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

MISC R/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

ARMY-AT Other Cont.	INTERNATIONAL INTEREST	TITLE CORE, FLEXIBLE SHAFT ASSEMBLY— TACHOMETER AND SPEEDOMETER	MILITARY STANDARD MS 51072
PROCUREMENT SPECIFICATION MIL-S-10215	SUPERSEDED	SHEET 1 OF 1	

DD FORM 672-1 (COORDINATED)

6880-0205

APPROVED 5 JUNE 1958 REVISED 1 2 JUN 86 1 1 AUG 87

USER ACTIVITIES: ARMY-RE

REVIEWER ACTIVITIES: DLA-GS