


REVISION ACTIVITIES: DLA-CS
 USER ACTIVITIES: ARMY-WE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AISC M/A
 DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

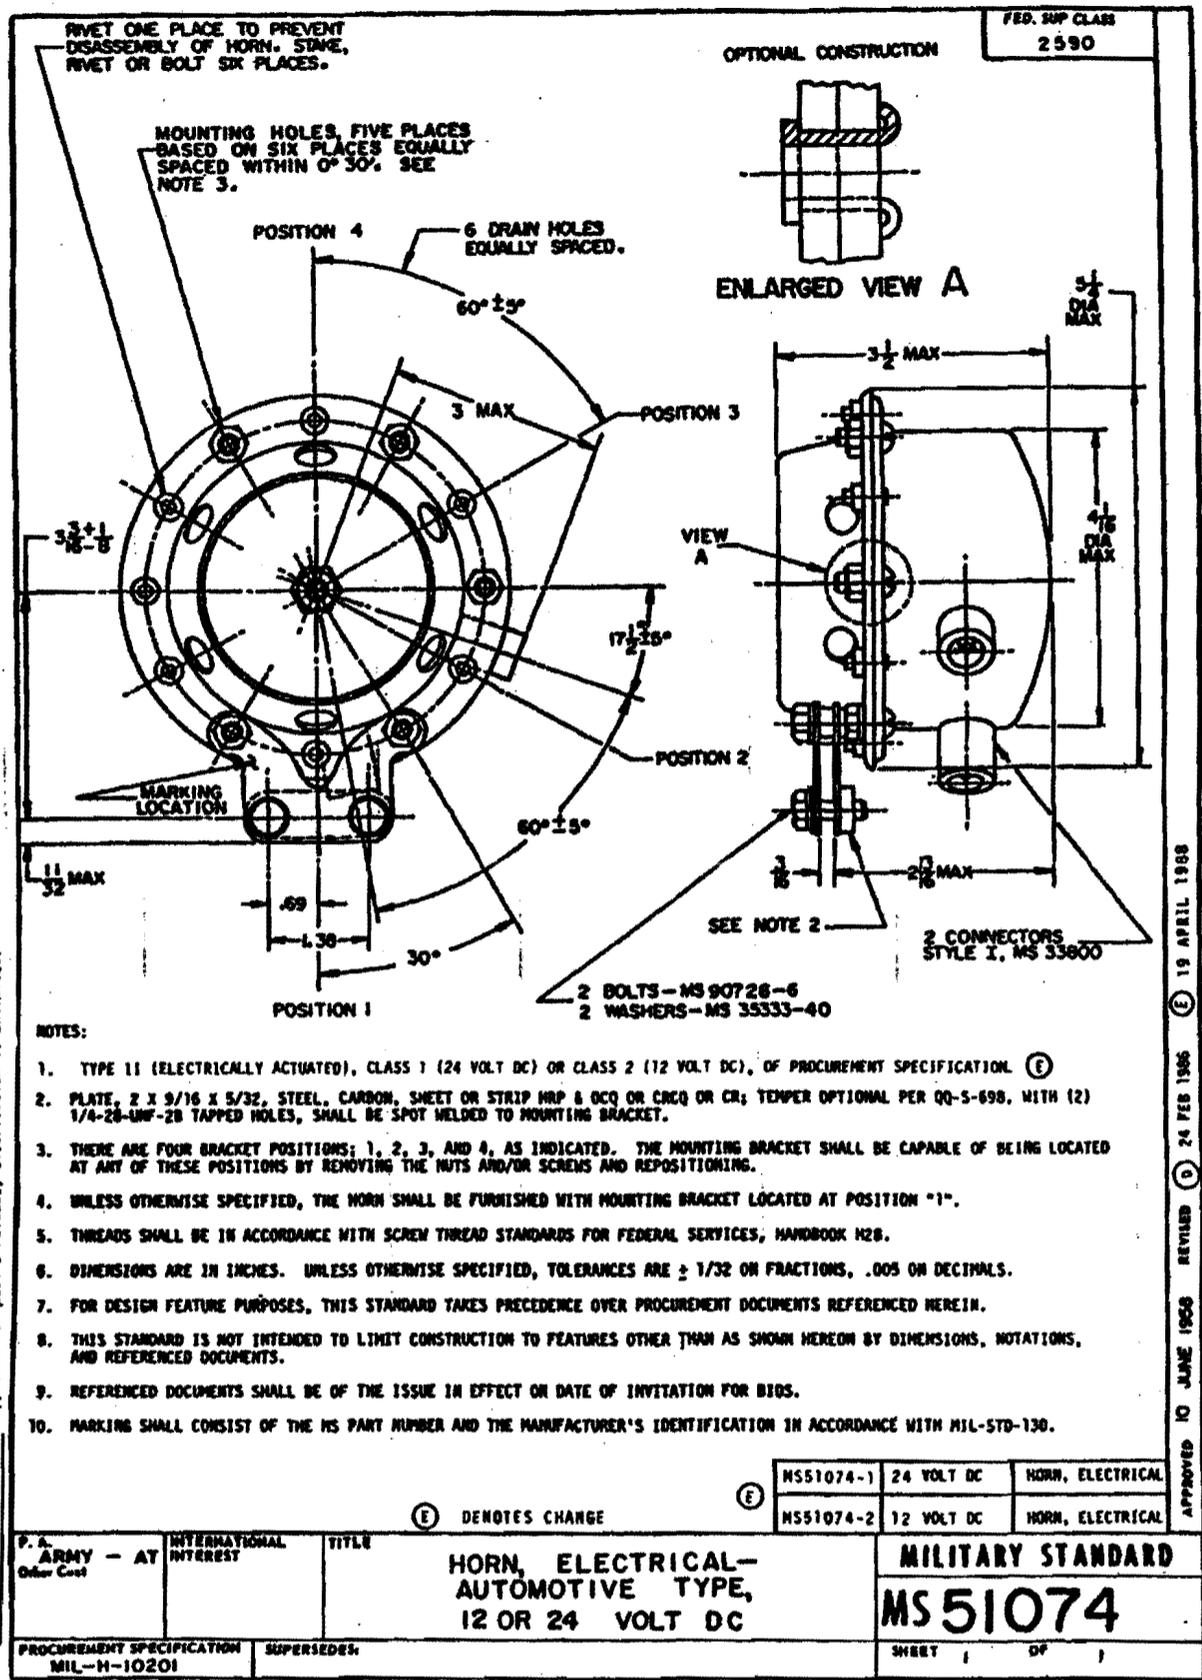

NOTES:

1. TYPE 11 (ELECTRICALLY ACTUATED), CLASS 1 (24 VOLT DC) OR CLASS 2 (12 VOLT DC), OF PROCUREMENT SPECIFICATION (E)
2. PLATE, 2 X 9/16 X 5/32, STEEL, CARBON, SHEET OR STRIP HRP & OCQ OR CR; TEMPER OPTIONAL PER QQ-S-698, WITH (2) 1/4-28-UNF-2B TAPPED HOLES, SHALL BE SPOT WELDED TO MOUNTING BRACKET.
3. THERE ARE FOUR BRACKET POSITIONS; 1, 2, 3, AND 4, AS INDICATED. THE MOUNTING BRACKET SHALL BE CAPABLE OF BEING LOCATED AT ANY OF THESE POSITIONS BY REMOVING THE NUTS AND/OR SCREWS AND REPOSITIONING.
4. UNLESS OTHERWISE SPECIFIED, THE HORN SHALL BE FURNISHED WITH MOUNTING BRACKET LOCATED AT POSITION "1".
5. THREADS SHALL BE IN ACCORDANCE WITH SCREW THREAD STANDARDS FOR FEDERAL SERVICES, HANDBOOK H28.
6. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/32 ON FRACTIONS, .005 ON DECIMALS.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
8. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
10. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.

(E) DENOTES CHANGE

MS51074-1	24 VOLT DC	HORN, ELECTRICAL
MS51074-2	12 VOLT DC	HORN, ELECTRICAL

P. A. ARMY - AT Other Code	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD	
		HORN, ELECTRICAL-AUTOMOTIVE TYPE, 12 OR 24 VOLT DC	MS51074	
PROCUREMENT SPECIFICATION MIL-H-10201	SUPERSEDES	SHEET	OF	

DD FORM 672-1 (COORDINATED)

2590-0217

APPROVED 10 JUNE 1966 REVISED (D) 24 FEB 1966 (E) 19 APRIL 1968