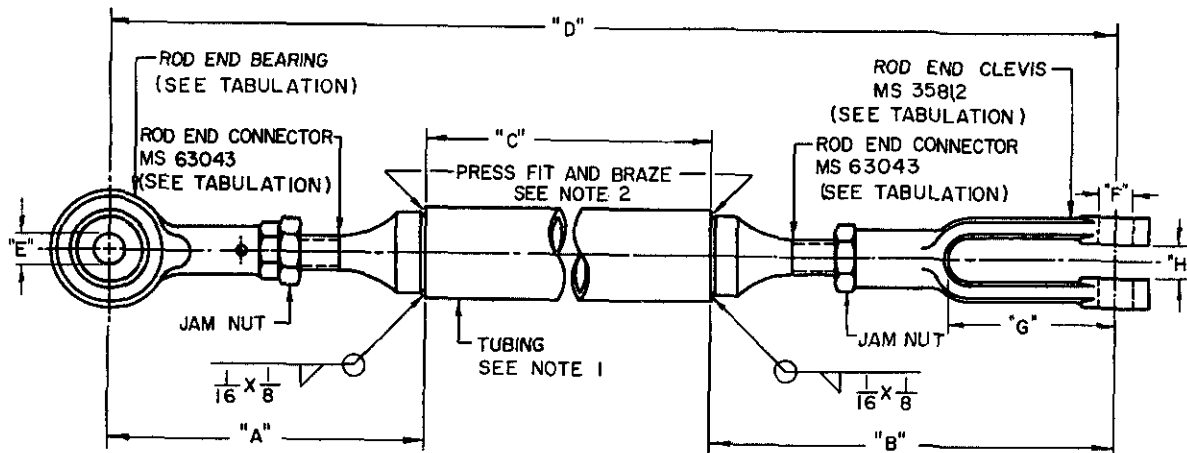


FED. SUP CLASS  
2530

SIZE NO.	ROD END BEARING PART NO.	ROD END CONNECTOR 2 REQUIRED	ROD END CLEVIS	JAM NUT 2 REQUIRED	THREAD SIZE UNF-2	LENGTH A $\pm 1/4$	LENGTH B $\pm 1/4$	DIA. E & F	DIM. G	DIM. H
1	7388852	MS 63043-1	MS 35812-3	MS 35691-13	5/16-24	2-3/4	3-1/2	5/16	1-7/16	11/32
2	8376284	MS 63043-2	MS 35812-4	MS 35691-21	3/8-24	2-7/8	3-3/4	3/8	1-5/8	7/16
3	8376445	MS 63043-3	MS 35812-6	MS 35691-37	1/2-20	3-1/4	4-1/8	1/2	3-1/16	9/16
4	8395793	MS 63043-4	MS 35812-7	MS 35691-53	5/8-18	3-1/2	6	5/8	3-11/16	11/16

THIS IS A DESIGN STANDARD

**© CANCELLED AFTER 21 OCTOBER 1982.  
NO SUPERSEDING STANDARD.**

## NOTES:

1. MATERIAL: TUBING, STEEL, CARBON, MT1010 TO MTX1020, ELECTRIC RESISTANCE WELDED, SPEC. QQ-T-830, 3/4 OD X 18 GAGE (0.049) WALL.
2. BRAZING SHALL BE IN ACCORDANCE WITH MIL-B-12672. BRAZING ROD SHALL CONFORM TO QQ-R-571, CLASS FS-RCUZN-1.
3. DIMENSION "D" SHALL BE AS SPECIFIED BY THE PROCUREMENT ACTIVITY.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
5. THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

P.A. ARMY-AT Other Cust	TITLE  CONNECTING LINK, RIGID: STRAIGHT	MILITARY STANDARD  <b>MS 51328 (AT)</b>
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

REVIEW ACTIVITIES:  
USER ACTIVITIES:

This military standard is approved by the U. S. Army Tank-Automotive Command, Department of the Army, and shall be used by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 18 APRIL 1960 REVISED (A) 7 OCTOBER 1966 (B) 17 JULY 1972 (C) 21 OCT 82