


FED. SUP CLASS
2640© **CANCELLED** AFTER 21 APRIL 1976

FOR NEW DESIGN AND PROCUREMENT USE TIRE AND RIM ASSOCIATION STANDARD YEARBOOK PER ZZ-V-25

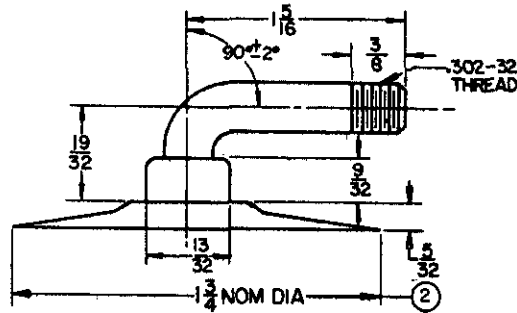

TYPE I, CLASS 6 OF PROCUREMENT SPECIFICATION

TR DENOTES TIRE AND RIM ASSOCIATION

NOTES:

1. VALVE CORE, MS51377 AND VALVE CAP, MS51375 ARE INCLUDED AS PART OF THIS ASSEMBLY.
2. BASE CONFIGURATION OPTIONAL PROVIDED CIRCULAR BASE AREA AT VALVE AXIS IS 1-3/4 INCHES NOMINAL DIAMETER.
3. DIMENSIONS SHOWN ARE IN INCHES.
4. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS AND REFERENCED DOCUMENTS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
7. MARKING SHALL CONSIST OF THE MS PART NUMBER, T & R IDENTIFICATION NUMBER, AND MANUFACTURER'S IDENTIFICATION, IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

USER ACTIVITIES: ARMY-MI, ME

APPROVED 23 MARCH 1961 REVISED (A) 28 JUNE 1963 (B) 12 APRIL 1967 (C) 21 APRIL 1976

MS PART NO.	TR IDENT NO.
MS 51362 -1	TR-87

P.A. ARMY-AT Other Cust NAVY-YD AF-84	TITLE VALVE, PNEUMATIC TIRE, INNER TUBE: RUBBER BASE, METAL STEM, STD. BORE, BENT 90°, VEHICULAR	MILITARY STANDARD MS51362
PROCUREMENT SPECIFICATION ZZ-V-25	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1

(COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

2640-0139