

USER ACTIVITIES
ARMY - NE
NAVY - AS, MC, OS, YD

REVIEWER ACTIVITIES
ARMY - CR
AIR FORCE - 82
DLA - 19

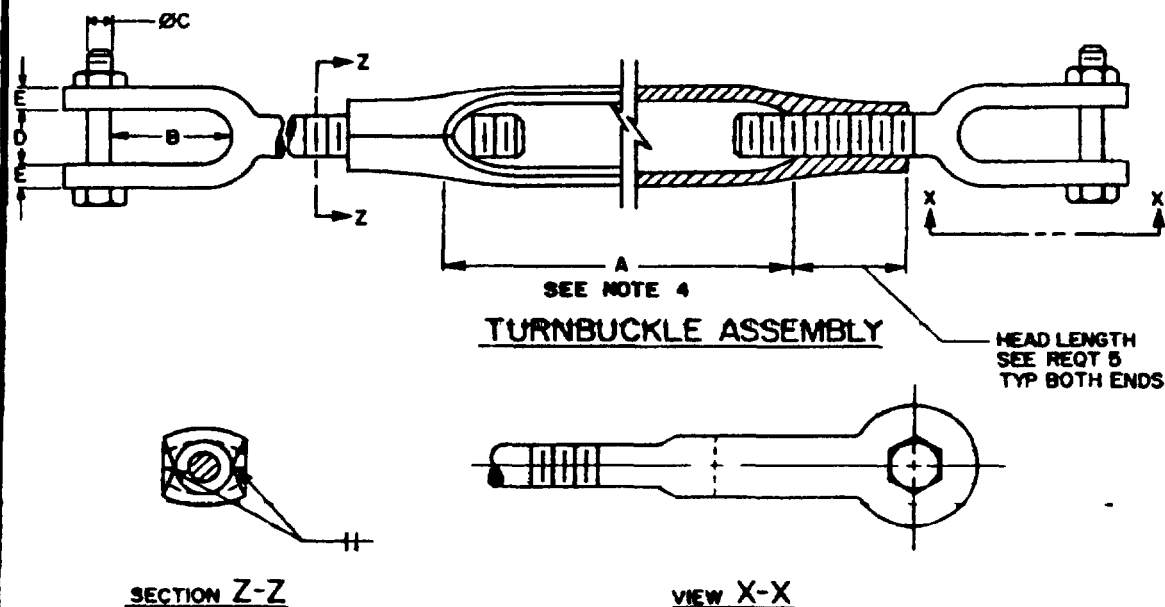


TABLE 1. DASH NUMBER AND DIMENSIONS

DASH NUMBER	NOMINAL THREAD SIZE	JAW				
		A MIN	B MIN	ØC MIN	D MIN	E MIN
1	250-20	4	.625	.250	.375	.125
2	.312-18	4.5	.719	.250	.468	.125
3	.375-16	6	.812	.312	.500	.187
4	.500-13	6	1.032	.375	.625	.250
5		9				
6		12				
7	.625-11	6	1.250	.500	.750	.312
8		9				
9		12				
10	.750-10	18	1.500	.625	.937	.375
11		6				
12		9				
13		12				
14		18				
15		24				
16	.875-9	12	1.750	.750	1.125	.437
17		18				
18		24				

P.A. ARMY - AR Other Code NAVY - SN AIR FORCE-89	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, FLAT BODY, JAW AND JAW (TYPE I, FORM 2, CLASS 7)	MILITARY STANDARD	
			MS51574	
PROCUREMENT SPECIFICATION FF - T - 791	SUPERSEDES	PAGE 1	OF 3	

APPROVED 17 FEB 1988 REVISED

DD FORM 1 MAY 72 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1814

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
-visions for all new engineering and design applications and for repetitive use shall be made from this
document when applicable

AMSC N/A

USER ACTIVITIES
ARMY - ME
NAVY - AS, MC, OS, YD

REVIEWER ACTIVITIES
ARMY - CR
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense.
Sections for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

FED SUP CLASS
5340

TABLE 1. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	NOMINAL THREAD SIZE	JAW				
		A MIN	B MIN	ØC MIN	D MIN	E MIN
23 24 25 26	1.250-7	12 18 24 36	2.375	1.125	1.750	.625
27 28 29 30 31	1.500-6	12 18 24 36 48	2.750	1.375	2.062	.687
32 33 34 35	1.750-5	18 24 36 48	3.000	1.625	2.375	.750
36 37 38	2.000-4.5	24 36 48	3.750	1.875	2.500	.812
39 40 41	2.250-4.5	24 36 48	4.000	2.062	2.625	.875
42 43 44	2.500-4	24 36 48	4.250	2.250	2.875	1.000

REQUIREMENTS:

- MATERIAL:** TURNBUCKLE BODY AND JAW PULLS SHALL BE MANUFACTURED FROM STEEL OF A COMPOSITION CAPABLE OF WITHSTANDING THE SPECIFIED BREAKING STRENGTH IN THE PROCUREMENT SPECIFICATION.
- FABRICATION METHOD:** THE TURNBUCKLE BODY AND END PULLS SHALL BE HOT FORGED.
- FINISH:**
RUST INHIBITOR - TURNBUCKLE BODY AND END PULLS SHALL BE TREATED WITH RUST INHIBITOR IN ACCORDANCE WITH MIL-C-85054 OR EQUIVALENT.
ZINC COATING - TURNBUCKLE BODY AND END PULLS SHALL BE ZINC COATED AS SPECIFIED IN PROCUREMENT SPECIFICATION, ASTM B633, TYPE 11, Fe/Zn 13.
- THREADS:** ONE END PULL AND THE CORRESPONDING HEAD BODY SHALL HAVE RIGHT HAND THREAD AND THE OTHER LEFT HAND. THE THREAD SHALL BE MACHINED AFTER FABRICATION OF END PULL AND THE HEAD BODY.
- LENGTH OF HEAD:** THE LENGTH OF THE HEAD OF THE TURNBUCKLE BODY SHALL BE NOT LESS THAN 1 1/2 TIMES THE NOMINAL THREAD SIZE FOR SIZES UP TO 1.250, AND 1 1/4 TIMES FOR SIZES GREATER THAN 1.250 NOMINAL THREAD SIZE.
- BREAKING STRENGTH:** THE BREAKING OF THE TURNBUCKLE SHALL BE NOT LESS THAN THE VALUE SPECIFIED IN THE PROCUREMENT SPECIFICATION FOR TYPE 1, FORM 1, WITH JAW END PULLS.
- BENDING STRENGTH:** THE BENDING STRENGTH SHALL BE AS SPECIFIED IN THE PROCUREMENT SPECIFICATION.
- LENGTH OF THREAD:** THE LENGTH OF THE THREAD ON THE TWO END PULLS SHALL BE GREAT ENOUGH SO THAT THE ENDS OF THE END PULLS CAN BE BROUGHT INTO CONTACT WITH EACH OTHER AT THE MIDDLE OF THE BODY LENGTH.
- PART NUMBER:** THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, FOLLOWED BY A DASH NUMBER FROM TABLE 1 AND THE FINISH CODE BELOW:

FINISH CODE:

F - RUST INHIBITOR TREATMENT
Z - ZINC COATED

EXAMPLE: MS51574-7Z

FINISH CODE
DASH NUMBER
BASIC MS NUMBER

MS51574-7Z INDICATES: TURNBUCKLE, FLAT BODY, JAW ENDS; .625-11 THREAD, 6-INCH CLEAR OPENING BETWEEN HEADS; ZINC COATED

REVISOR
APPROVED 17 FEB 1968

PA ARMY - AR Other Cont NAVY - SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, FLAT BODY, JAW AND JAW (TYPE I, FORM 2, CLASS 7)	MILITARY STANDARD MS51574
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES	PAGE 2	OF 3

DD FORM 672-1 (COORDINATED)

PRINTED ON RECYCLED PAPER

5340-1814

FED SUP CLASS
5340

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. TOLERANCES SHALL BE IN ACCORDANCE WITH STANDARD MANUFACTURING PRACTICES FOR TURNBUCKLES.
2. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
3. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DOOISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
4. DIMENSION "A" IS THE THICK UP LENGTH OR CLEAR OPENING OF THE BODY.

USER ACTIVITIES
ARMY - ME
NAVY - AS, MC, OS, YD

REVIEWER ACTIVITIES
ARMY - CR
AIR FORCE - 82
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 17 FEB 1968 REVISED

PA ARMY-AR Other Code NAVY-SH AIR FORCE-99	INTERNATIONAL INTEREST	TITLE TURNBUCKLE, FLAT BODY, JAW AND JAW (TYPE I, FORM 2, CLASS 7)	MILITARY STANDARD MS51574
PROCUREMENT SPECIFICATION FF-T-791	SUPERSEDES	PAGE 3	OF 3

DD FORM 1 MAY 63 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5340-1814