

INCH-POUND


MS51890C
 20 November 2020
 SUPERSEDING
 MS51890B
 w/AMENDMENT 1
 26 January 2019

DETAIL SPECIFICATION SHEET

FITTINGS, HYDRAULIC TUBE, FLARED 37 DEGREES AND FLARELESS,
 STEEL; CAP ASSEMBLY

This specification is approved for use by all Departments and
 Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet
 and MIL-DTL-18866.

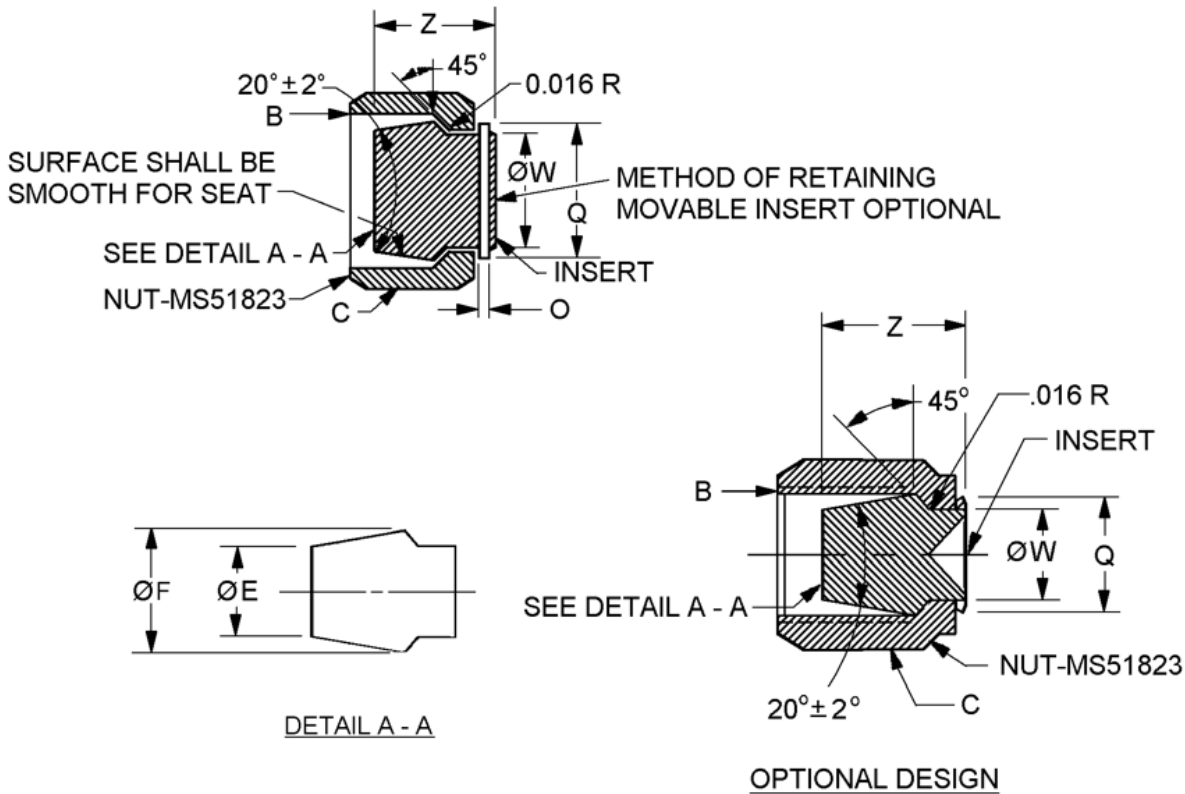

See notes at end of figure.

FIGURE 1. Cap assembly, tube, flareless, hydraulic.



MS51890C

Dash number	Tube OD Nom inches (mm)	B Straight thread ASME B1.1 Class 2B	C Hex flat nominal	E Diameter inches (mm) +.005 (0.13) -.000	F Diameter inches (mm) ±.02 (0.5)
-1	.1250 (3.175)	.3125 - 24UNF	3/8	.126 (3.20)	.22 (5.59)
-2	.1875 (4.763)	.3750 - 24UNF	7/16	.187 (4.75)	.28 (7.11)
-3	.2500 (6.350)	.4375 - 20UNF	9/16	.252 (6.40)	.34 (8.64)
-4	.3125 (7.938)	.5000 - 20UNF	5/8	.315 (8.00)	.41 (10.41)
-5	.3750 (9.525)	.5625 - 18UNF	11/16	.377 (9.58)	.47 (11.94)
-6	.5000 (12.700)	.7500 - 16UNF	7/8	.503 (12.78)	.62 (15.75)
-7	.6250 (15.875)	.8750 - 14UNF	1	.630 (16.00)	.75 (19.05)
-8	.7500 (19.050)	1.0625 - 12UN	1 1/4	.755 (19.18)	.88 (22.35)
-9	.8750 (22.225)	1.1875 - 12UN	1 3/8	.875 (22.23)	1.00 (25.40)
-10	1.0000 (25.400)	1.3125 - 12UN	1 1/2	1.005 (25.53)	1.16 (29.46)
-11	1.2500 (31.750)	1.6250 - 12UN	2	1.257 (31.93)	1.41 (35.81)
-12	1.5000 (38.100)	1.8750 - 12UN	2 1/4	1.507 (38.28)	1.66 (42.16)
-13	2.0000 (50.800)	2.5000 - 12UN	2 7/8	2.000 (50.80)	2.19 (55.63)

Dash number	O Thickness inches (mm) ±.06 (1.52)	Q Maximum inches (mm)	W Diameter inches (mm) +.004 (0.10) -.000	Z Length inches (mm) ±.09 (2.3)
-1	.05 (1.3)	.25 (6.4)	.125 (3.18)	.49 (12.5)
-2	.05 (1.3)	.25 (6.4)	.181 (4.60)	.57 (14.5)
-3	.05 (1.3)	.38 (9.7)	.246 (6.25)	.64 (16.3)
-4	.05 (1.3)	.50 (12.7)	.310 (7.87)	.66 (16.8)
-5	.05 (1.3)	.50 (12.7)	.372 (9.45)	.68 (17.3)
-6	.06 (1.5)	.62 (15.8)	.498 (12.65)	.84 (21.3)
-7	.06 (1.5)	.75 (19.1)	.625 (15.88)	.85 (21.6)
-8	.06 (1.5)	.88 (22.4)	.750 (19.05)	.84 (21.3)
-9	.06 (1.5)	1.00 (25.4)	.875 (22.23)	.87 (22.1)
-10	.09 (2.3)	1.25 (31.8)	1.000 (25.40)	.99 (25.15)
-11	.12 (3.1)	1.50 (38.1)	1.250 (31.75)	1.10 (27.9)
-12	.16 (4.1)	1.75 (44.5)	1.500 (38.10)	1.21 (30.7)
-13	.16 (4.1)	2.25 (57.2)	2.000 (50.80)	1.18 (30.0)

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Remove all burrs and slivers.
4. Dimensions and tolerances not shown shall be in accordance with SAE-J514.
5. The drawing is for identification purposes only and is not intended to restrict designs and shapes not dimensioned.

FIGURE 1. Cap assembly, tube, flareless, hydraulic - Continued.

MS51890C

REQUIREMENTS:

Cap assembly shall be as specified on figure 1.


Insert shall be movable and permanently secured to the nut to prevent assembly from coming apart. A physical and permanent retention method shall be present.

Materials shall be in accordance with MIL-DTL-18866.

Finish and finish designators shall be in accordance with MIL-DTL-18866.

Unless otherwise specified in MIL-DTL-18866, all plating's shall be capable of meeting 96-hour salt spray test in accordance with ASTM B117. The fittings shall show no evidence of red corrosion after 96 hours of salt spray. Fluid passages, other openings, and internal threads shall not be subject to the plating thickness requirement and may have bare areas provided they are protected with a light film of oil.

PIN: The PIN consists of the letters "MS", the specification number, a dash number for the cap assembly size, and a letter for material and finish designator.

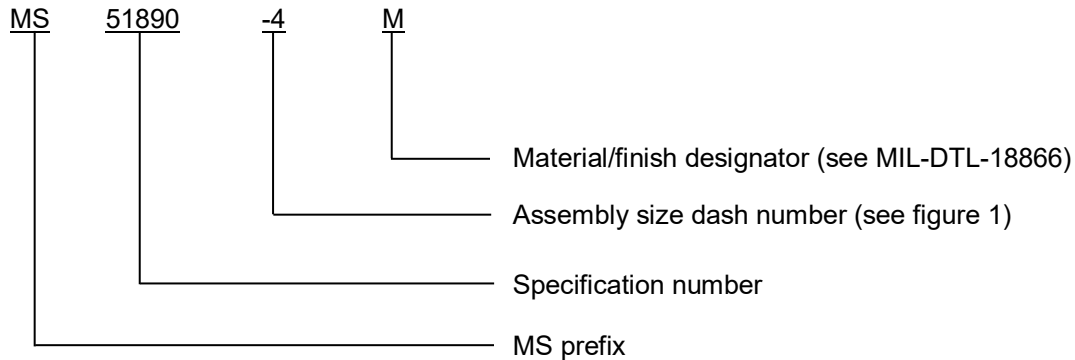

PIN example: MS51890-4M indicates a cap assembly, .3125 inch (7.938 mm), nickel-copper alloy.

Marking shall be in accordance with MIL-DTL-18866.

Class I and II ozone depleting substances (ODS) shall not be used in MS51890 or any referenced procedures.

Order of precedence. Unless otherwise noted herein or in the contract, in the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Referenced documents shall be of the issue in effect on date of invitations for bid.

Material/finish designator SS has been replaced by "S".

Phosphate coating finish "P" has been replaced by "KA".

MS51890C

NOTE: The following restrictions do not apply to manufactures of the fittings and is applicable only to OEM's and users.

Zinc-plated materials should be avoided in hydraulic systems with water-glycol fluids. Reference ASTM MNL37 - Fuels and Lubricants Handbook, "water glycol fluids are highly alkaline due to the presence of amine based corrosion inhibitors. As a result, these fluids can attack zinc, cadmium, magnesium, and non-anodized aluminum, forming sticky or gummy residues. Consequently, these metals should be avoided when selecting system components.

Cadmium is not recommended. To the users of this document, it is recommended that the use of carbon steel material with cadmium plating be used only when other materials and finishes specified in this document cannot meet performance requirements.

Army and Marine ground forces zinc plating's. PIN codes FC, FD, Z, and ZC finishes have a chromate conversion coating which includes hexavalent chromium and are not recommended for Army and Marine ground systems. The use of coatings depositing hexavalent chromium for Army vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement. For new designs PIN codes FC, FD, Z, and ZC are not to be supplied to Army and Marine ground forces. MIL-PRF-32647 Type KA is intended as a hazardous free plating material and is a direct replacement for zinc plating with a hexavalent chromium conversion coating. KA has an equivalent torque/tension as the plating's replaced.

Army and Marine ground vehicles. The use of cadmium plating for Army and Marine ground vehicles is prohibited unless otherwise explicitly stated in the contract as a requirement.

Army ground vehicle applications cadmium plating. Pin code J or KB may be substituted for cadmium ("Blank" PIN code) for Army ground vehicle applications. MIL-PRF-32647 Type KB is intended as a hazardous free plating material and is a direct replacement for cadmium plating ("Blank" PIN code). KB has an equivalent torque/tension as cadmium.

NAVSEA shipboard owned equipment. Cadmium is prohibited from use in NAVSEA-owned shipboard systems in accordance with the requirements of T9070-AL-DPC-020/077-2, unless otherwise approved by NAVSEA.

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

Referenced documents. In addition to MIL-DTL-18866, this document references the following:

MIL-PRF-32647	ASTM MNL37
MS51823	SAE-J514
ASME B1.1	T9070-AL-DPC-020/077-2
ASTM B117	

MS51890C

CONCLUDING MATERIAL

Custodians:

Army - AR
Navy - SH
Air Force - 71
DLA - CC

Preparing activity:

DLA - CC

(Project 4730-2021-010)

Review activities:

Army - AT
Navy - AS, OS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil>.