


FED. SUP CLASS
5330

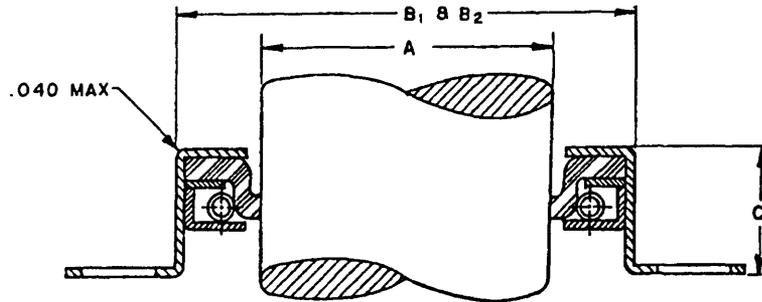

FIRST DASH NUMBER (SIZE)	A SHAFT DIA (NOM)	B ₁ SEAL O.D. (5)	B ₂ HOUSING BORE (REF)	C WIDTH
11	1-5/8	4.312	4.307	15/32 ±.020
12	2	4.375	4.370	21/32 ±.020
13	2	4.500	4.495	25/32 ±.020
14	2-1/16	4.750	4.745	15/32 ±.020
15	2-7/16	5.750	5.745	3/4 ±.020

REQUIREMENTS:

- THE ABOVE DESIGN IS FOR REFERENCE ONLY. OTHER DESIGNS WHICH MEET THE FUNCTIONAL REQUIREMENTS OF THIS TYPE OF SEAL ARE ACCEPTABLE.
- SEALING MEMBERS SHALL CONFORM TO ONE OF THE FOLLOWING CLASSES:
 CLASS 1: POLYMER-IMPREGNATED LEATHER OR CHROME RETAINED LEATHER IN ACCORDANCE WITH KK-L-164 TANNAGE \square . LEATHER SEALING MEMBERS SHALL BE MOLD-PROOFED IN ACCORDANCE WITH O-L-164 (FOR NORMAL OPERATING TEMPERATURE).
 CLASS 2: OIL RESISTANT SYNTHETIC ELASTOMER (FOR NORMAL OPERATING TEMPERATURE).
 CLASS 3: OIL RESISTANT ELASTOMER IN ACCORDANCE WITH HIGH AND LOW TEMPERATURE TESTS OF MIL-S-45005 (FOR EXTREME OPERATING TEMPERATURE).
- MARKING SHALL CONSIST OF THE MS NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.
- THE PART NUMBER CONSISTS OF THE MS NUMBER AND 2 DASH NUMBERS.
 FIRST DASH NUMBER INDICATES THE SIZE.
 SECOND DASH NUMBER INDICATES THE CLASS.
 EXAMPLE: MS51908-12-3 INDICATES SIZE NUMBER 12 WITH CLASS 3 SEALING MEMBER.
- DIMENSIONS ARE IN INCHES. TOLERANCES ARE ± .002 FOR SEAL O.D. UP TO 2.000; +.003 -.002 FOR SEAL O.D. UP TO 3.000; and +.004 -.002 FOR SEAL O.D. UP TO 7.000.

NOTES:

- THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS OR REFERENCED DOCUMENTS.
- FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
- REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.
- THE USE OF RECYCLED MATERIALS WHICH MEET THE REQUIREMENTS OF THE APPLICABLE MATERIAL SPECIFICATION WITHOUT JEOPARDIZING THE INTENDED USE OF THE ITEM SHALL BE ENCOURAGED.

(D) ENTIRE STANDARD REVISED

USER ACTIVITIES:

IV-AR

REVIEWER ACTIVITIES

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. ANSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 14 SEPTEMBER 1961 REVISED (D) 27 OCT 86

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEAL, PLAIN ENCASED: SPRING LOADED, FLANGED TYPE	MILITARY STANDARD
			MS51908
PROCUREMENT SPECIFICATION MIL-S-45005	SUPERSEDES:	CLHX6	SHEET 1 OF 2

FED. SUP CLASS
5330

INTERCHANGEABILITY TABLE

THE FOLLOWING MS DASH NUMBERS ARE CANCELLED AFTER 29 DECEMBER 1967
THE CANCELLED SEALS SHOULD BE USED FOR MAINTENANCE PURPOSES
UNTIL EXISTING STOCK IS EXHAUSTED. USE ONLY THE SUPERSEDING
SEAL DASH NUMBERS FOR NEW DESIGN AND PROCUREMENT.

CANCELLED PART NUMBER - CLASS - SIZE	SUPERSEDING PART NUMBER - SIZE - CLASS
MS51908 - 1 - 1 - 1 - 2 - 1 - 3 - 1 - 4 - 1 - 5	MS51908 - 11 - 1 - 12 - 1 - 13 - 1 - 14 - 1 - 15 - 1
MS51908 - 2 - 1 - 2 - 2 - 2 - 3 - 2 - 4 - 2 - 5	MS51908 - 11 - 2 - 12 - 2 - 13 - 2 - 14 - 2 - 15 - 2
MS51908 - 3 - 1 - 3 - 2 - 3 - 3 - 3 - 4 - 3 - 5	MS51908 - 11 - 3 - 12 - 3 - 13 - 3 - 14 - 3 - 15 - 3

USER ACTIVITIES:

REVIEWER ACTIVITIES: ARMY-AR

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AvSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

(D) ENTIRE STANDARD REVISED

APPROVED 14 SEPTEMBER 1961 REVISED (D) 27 OCT 86

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEAL, PLAIN ENCASED: SPRING LOADED, FLANGED TYPE	MILITARY STANDARD MS51908
PROCUREMENT SPECIFICATION MIL-S-45005	SUPERSEDES:	CLHX6	SHEET 2 OF 2