

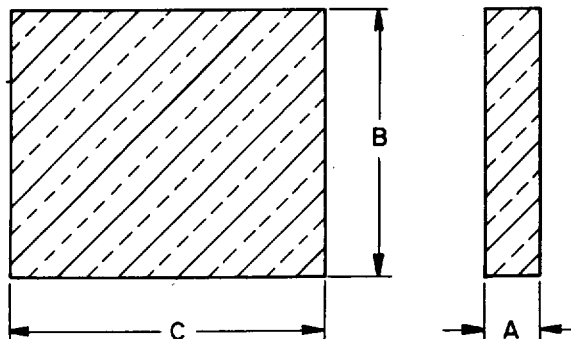
FED. SUP CLASS  
9535

TABLE I. DASH NUMBERS.

DASH NO	A	B	C	TEMPER
001	.032	36	144	ANNEALED
003	.050	36	144	ANNEALED
005	.063	36	144	ANNEALED
007	.080	36	144	ANNEALED
009	.125	36	144	ANNEALED

## REQUIREMENTS:

1. MATERIAL. COPPER BASE ALLOY 240 (UNS C24000), AS SPECIFIED IN PROCUREMENT DOCUMENT.
2. FORMING PROCESS. ROLLED - CODE "R".
3. PART NUMBER. THE PART NUMBER CONSISTS OF THE BASIC MS NUMBER, PLUS A FORMING PROCESS CODE, PLUS A DASH NUMBER FROM TABLE I.

EXAMPLE: MS52028R001

DASH NUMBER FROM TABLE I

ROLLED (SEE REQUIREMENT 2)

BASIC MS NUMBER

4. MARKING. COPPER AND COPPER BASE ALLOYS SHALL BE MARKED IN ACCORDANCE WITH FED-STD-185 WITH THE EXCEPTION THAT A PART NUMBER FROM THIS MILITARY STANDARD SHALL BE INCLUDED AS PART OF THE IDENTIFICATION MARKING.

## NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THE REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
3. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:

REVIEWER ACTIVITIES:  
AIR FORCE - 84  
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. Other Cust	MR SH 99	INTERNATIONAL INTEREST	TITLE  <b>SHEET, METAL, COPPER BASE ALLOY 240</b>	<b>MILITARY STANDARD</b>  <b>MS52028</b>
PROCUREMENT SPECIFICATION QQ-B-613		SUPERSEDES:		PAGE   OF

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

9535-0373

APPROVED 25 OCT 84  
REVISED