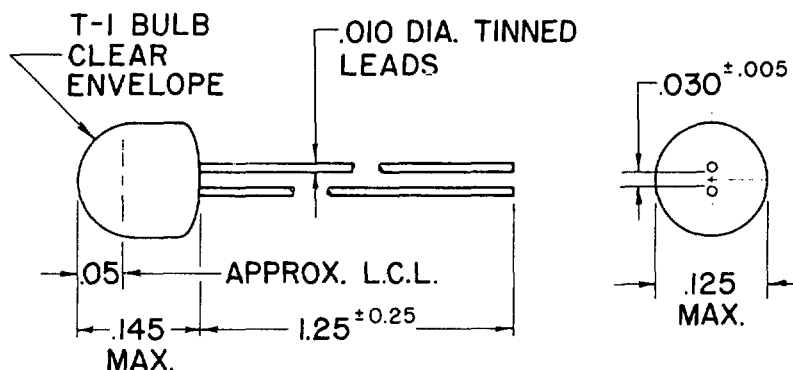


FED. SUP CLASS
6240

PART NUMBER	TRADE NUMBER	FINISH	RATED VOLTAGE	RATED CURRENT $\pm 10\%$	SCP $\pm 15\%$	MINIMUM LIFE HOURS
MS90451-6802	6802	CLEAR	5.0	.060	.03	4000
MS90451-6832	6832	CLEAR	5.0	.060	.05	4000
MS90451-7132	7132	CLEAR	5.0	.075	.09	4000
MS90451-7152	7152	CLEAR	5.0	.115	.15	4000

SPHERICAL CANDLEPOWER (SCP) MUST BE OBTAINABLE AT RATED VOLTAGE. LAMPS SHALL BE AGED FOR 10 HOURS AT RATED VOLTAGE BEFORE MEASURING SCP.

SCP AT 1000 HOURS SHALL NOT BE LESS THAN 80% OF INITIAL SCP MEASURED AT RATED VOLTAGE.

DIMENSIONS IN INCHES.

FOR DESIGN FEATURES PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

This standard has been approved by the NAVAIRSYSCOM Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Navy -AS
Other Cust

TITLE LAMP, INCANDESCENT, T-1 BULB,
SHORT, INTEGRAL LIGHTING

MILITARY STANDARD

MS90451 (AS)

PROCUREMENT SPECIFICATION
MIL-L-6363

SUPERSEDES:

SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
1 SEP 57

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

APPROVED 17 MAY 67 REVISED