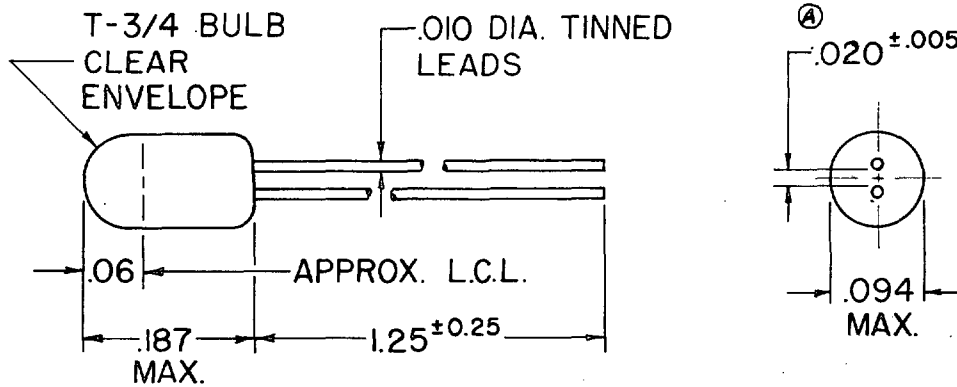


FED. SUP CLASS
6240

PART NUMBER	TRADE NUMBER	FINISH	RATED VOLTAGE	RATED CURRENT ± 10 %	SCP ± 15 %	MINIMUM LIFE HOURS
MS90452-6803	6803	CLEAR	5.0	.060	.03	4000
MS90452-6833	6833	CLEAR	5.0	.060	.05	4000
MS90452-7133	7133	CLEAR	5.0	.075	.09	4000
MS90452-7153	7153	CLEAR	5.0	.115	.15	4000

SPHERICAL CANDLEPOWER (SCP) MUST BE OBTAINABLE AT RATED VOLTAGE. LAMPS SHALL BE AGED FOR 10 HOURS AT RATED VOLTAGE BEFORE MEASURING SCP.

SCP AT 1000 HOURS SHALL NOT BE LESS THAN 80% OF INITIAL SCP

DIMENSIONS IN INCHES.

L.C.L. DENOTES LIGHT CENTER LENGTH

FOR DESIGN FEATURES PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

P.A. Navy - AS Other Cust	TITLE LAMP, INCANDESCENT, T-3/4 BULB, INTEGRAL LIGHTING	MILITARY STANDARD
		MS90452 (AS)
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Limited coordination)
1 SEP 67

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the NAVAIRSYSCOM Department of the Navy and is mandatory for use by their activity. All other military activities are required to employ this standard where suitable.

APPROVED 17 MAY 67 REVISED 25 OCT 67