


5306

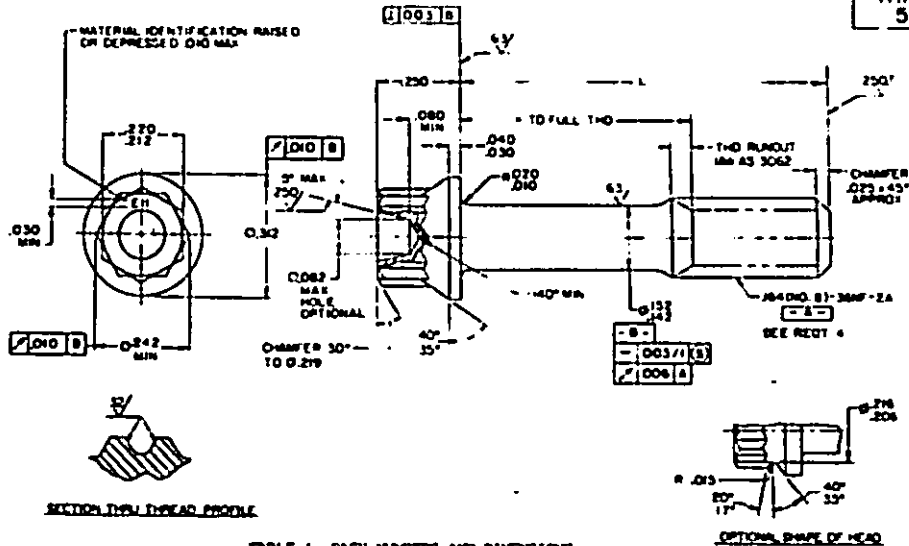

LINEAR ACTIVITIES:

REVISIONS ACTIVITIES:
DLA-1S

TABLE 1 DASH NUMBERS AND DIMENSIONS

DASH NO.	L	R +.000 -.060	APPROX WEIGHT LB/100
-03	.312	✓	.451
-04	.375	✓	.482
-05	.438	✓	.513
-06	.500	✓	.543
-07	.562	✓	.573
-08	.625	✓	.604
-09	.688	✓	.634
-10	.750	.125	.664
-11	.812	.188	.695
-12	.875	.250	.725
-13	.938	.312	.756
-14	1.000	.375	.786
-15	1.062	.438	.816
-16	1.125	.500	.847

DASH NO.	L	R +.000 -.060	APPROX WEIGHT LB/100
-17	1.188	.562	.878
-18	1.250	.625	.908
-19	1.312	.688	.938
-20	1.375	.750	.969
-21	1.438	.812	.999
-22	1.500	.875	1.029
-23	1.562	.938	1.060
-24	1.625	1.000	1.090
-25	1.688	1.062	1.121
-26	1.750	1.125	1.151
-27	1.812	1.250	1.212
-28	2.000	1.375	1.273

1/ THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS.

REQUIREMENTS:

- MATERIAL: STEEL, A5132 (UNS G87400).
- HARDNESS: 26-32 HRC
- FINISH: CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
- THREADS: THREADS IN ACCORDANCE WITH MIL-B-7742. INCOMPLETE THREADS NOT TO ENTER FILLET.
- DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH AMS Y14.5M.
- WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS 870.
- SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD.
- MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION PER AMS 2640.
- TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONING ±.010, ANGULAR DIMENSIONING ±5°.
- EDGES: BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.

INACTIVE FOR NEW DESIGN AFTER 26 OCT 72

Ⓢ ENTIRE STANDARD REVISED

P.A. NAVY-AS Other Com	INTERNATIONAL INTEREST	TITLE BOLT-MACHINE, STEEL, 12 POINT HEAD, J64(NO. 8)-36, CADMIUM PLATE	MILITARY STANDARD	
			MS9186	
AIR FORCE-11	PROCUREMENT SPECIFICATION AMS 7452	SUPERSEDES:	PAGE 1	OF 2

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
 This military standard is approved for use by all Departments and Agencies of the Department of Defense.
 Revisions for all new engineering and design applications and for reprintable use shall be made from this document when applicable.

AMS/N/A

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


5306-1173

REVIEWED Ⓢ 13 JUL 87

APPROVED 31 MAR 58

FED SUP CLASS
5306

11. PART NUMBER: THE PART SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.



MS9186-03 INDICATES: BOLT-MACHINE, STEEL, 12 POINT HEAD, .164-36, CADMIUM PLATE, .312 LONG.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

USER ACTIVITIES:

REVIEWER ACTIVITIES:
DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 31 MAR 56 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

P.A. NAVY-AS		INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD MS9186
Other Cost			BOLT-MACHINE, STEEL, 12 POINT HEAD, .164 (NO. 8)-36, CADMIUM PLATE	
AIR FORCE-11				PAGE 2 OF 2
PROCUREMENT SPECIFICATION AMS 7452		SUPERSEDES:		

DD FORM 1 MAY 53 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-1173