

USER ACTIVITIES:

REVIEWER ACTIVITIES:

AIR FORCE-82

ARMY-MI

DLA-IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

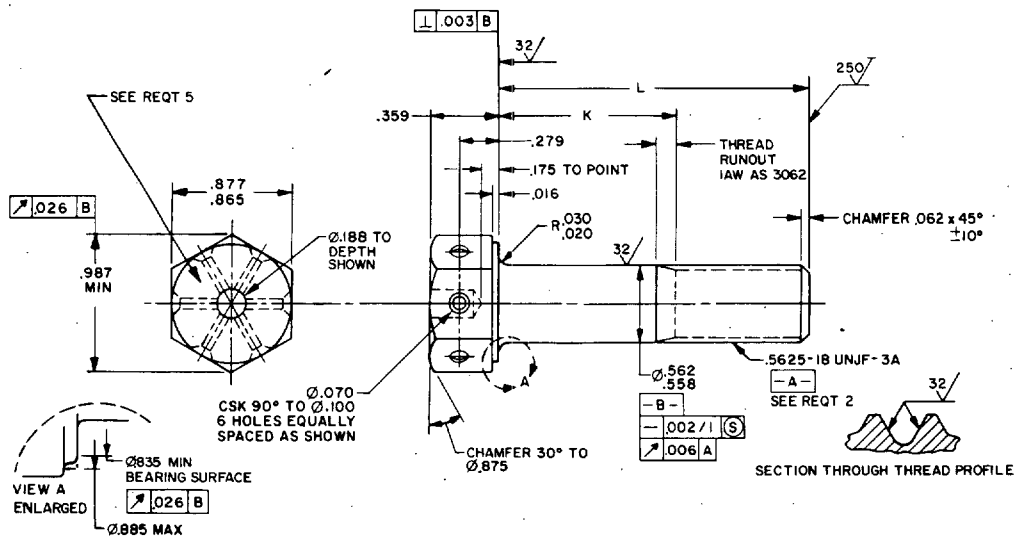


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NO	L	K	APPROX WEIGHT LB/100	DASH NO	L	K	APPROX WEIGHT LB/100
-04	.875	.113-.133	12.08	-29	3.000	1.565-1.625	27.05
-05	.938	.113-.133	12.52	-30	3.125	1.690-1.750	27.93
-06	1.000	.113-.133	12.96	-31	3.250	1.815-1.875	28.81
-07	1.062	.113-.133	13.40	-32	3.375	1.940-2.000	29.69
-08	1.125	.113-.133	13.81	-33	3.500	2.065-2.125	30.57
-09	1.188	.113-.133	14.28	-34	3.625	2.190-2.250	31.45
-10	1.250	.113-.133	14.72	-35	3.750	2.315-2.375	32.34
-11	1.312	.113-.133	15.16	-36	3.875	2.440-2.500	33.22
-12	1.375	.113-.133	15.61	-37	4.000	2.565-2.625	34.10
-13	1.438	.113-.133	16.05	-38	4.125	2.690-2.750	34.98
-14	1.500	.113-.133	16.49	-39	4.250	2.815-2.875	35.86
-15	1.562	.128-.188	16.93	-40	4.375	2.940-3.000	36.74
-16	1.625	.190-.250	17.27	-41	4.500	3.065-3.125	37.62
-17	1.688	.252-.312	17.81	-42	4.625	3.190-3.250	38.50
-18	1.750	.315-.375	18.25	-43	4.750	3.315-3.375	39.38
-19	1.812	.378-.438	18.69	-44	4.875	3.440-3.500	40.26
-20	1.875	.440-.500	19.13	-45	5.000	3.565-3.625	41.14
-21	2.000	.565-.625	20.01	-46	5.125	3.690-3.750	42.02
-22	2.125	.690-.750	20.89	-47	5.250	3.815-3.875	42.90
-23	2.250	.815-.875	21.77	-48	5.375	3.940-4.000	43.78
-24	2.375	.940-1.000	22.65	-49	5.500	4.065-4.125	44.66
-25	2.500	1.065-1.125	23.53	-50	5.625	4.190-4.250	45.54
-26	2.625	1.190-1.250	24.41	-51	5.750	4.315-4.375	46.42
-27	2.750	1.315-1.375	25.29	-52	5.875	4.440-4.500	47.30
-28	2.875	1.440-1.500	26.17	-53	6.000	4.565-4.625	48.18
				-54	1.938	.502-.562	19.57

① ENTIRE STANDARD REVISED

P.A.
NAVY-AS
Other Cust
AIR FORCE-99INTERNATIONAL
INTERESTTITLE
BOLT, MACHINE-HEXAGON HEAD, DRILLED,
6 HOLES, FULL SHANK, .5625-18 UNJF-3AMILITARY STANDARD
MS9589PROCUREMENT SPECIFICATION
AMS7477

SUPERSEDES:

PAGE 1 OF 2

DD FORM 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE


5306-1184

APPROVED 5 MAY 1965 REVISED ① 30 SEPT 87

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5731 (UNS S66286).
2. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645.
4. SURFACE TEXTURE: SURFACE TEXTURE IN ACCORDANCE WITH ANSI B46.1. UNLESS OTHERWISE SPECIFIED, SURFACE TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
5. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478 CLASS A.
6. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M.
7. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS $\pm .010$, ANGULAR DIMENSIONS $\pm 5^\circ$.
8. EDGES: BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
9. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9589-04



MS9589-04 INDICATES - BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK AMS 5731, .5625-18 UNJF-3A x .875 LONG

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
4. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS.

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
ARMY-MI
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

APPROVED 5 MAY 1965 REVISED ① FOR CHANGES SEE PAGES 1 AND 2

P.A. NAVY - AS Other Cust	INTERNATIONAL INTEREST	TITLE BOLT, MACHINE-HEXAGON HEAD, DRILLED, 6 HOLES, FULL SHANK, .5625-18 UNJF-3A	MILITARY STANDARD
AIR FORCE-99			MS9589
PROCUREMENT SPECIFICATION AMS7477	SUPERSEDES:	PAGE 2 OF 2	

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-1184